

## Multiband Microstrip Patch Antenna for LTE Application

Abdul Rahim Dewan<sup>1</sup>, Amirudin Ibrahim<sup>1\*</sup>, Raimi Dewan<sup>2,3</sup>, Ahmad Rashidy Razali<sup>1</sup>, Aslina Abu Bakar<sup>1</sup>

<sup>1</sup>Faculty of Electrical Engineering, Universiti Teknologi MARA, Cawangan Pulau Pinang, Kampus Permatang Pauh, 13500 Permatang Pauh, Pulau Pinang, Malaysia.

<sup>2</sup>Advanced Diagnostics and Progressive Human Care (Diagnostic), School of Biomedical Engineering & Health Sciences, Faculty of Engineering, Universiti Teknologi Malaysia 81310 UTM Johor, Malaysia.

<sup>3</sup>Institute of Electronics and Telecommunication of Rennes, University of Rennes 1, 35000 Rennes, France.

Received 8 February 2021, Revised 26 March 2020, Accepted 1 April 2021

### ABSTRACT

*This paper presents a multiband patch antenna for LTE applications. Conventional single band antenna only operates at one specific frequency and will require multiple single band antenna to support multiband application. Consequently, the antennas will consume more space in the microwave circuitry. The propose antenna is designed to operate at multiple LTE frequencies, which are 1.8 GHz, 2.1 GHz, and 2.6 GHz. The simulation will be done using Computer Simulation Technology (CST) Microwave Studio software and will be fabricated for further development. The simulated reflection coefficient (S11) results for the proposed design are -14 dB, -23 dB and -18 dB while the measurement results are -13 dB, -16 dB and -16 dB. Both results are simulated and measured at 1.8 GHz, 2.1 GHz, and 2.6 GHz respectively.*

**Keywords:** Antenna, LTE, Microstrip, Multiband, Patch

## 1. INTRODUCTION

The advancement in communication technologies and higher demand from customers for a better and faster mobile technology, brings a huge challenge for engineers and researchers to rapidly enhance and upgrade the mobile technology in order to fulfill the users demand and can be fully utilized by the customers. The Fourth Generation (4G) also known as Long Term Evolution (LTE) has successfully used worldwide since the second quarter of 2015 where it covers 744 million subscriptions [1]. During the year, there are several Malaysia's major mobile operators already started to investing into the LTE. Maxis Berhad was the earliest mobile operator that has introduced LTE service as early as January 2013. This step has triggered its competitor such as Celcom Axiata Berhad and Digi Telecommunications Sdn Bhd introduced the LTE in April and July respectively in the same year. Other mobile providers followed by the other mobile network provider such as YES-YTL and Unifi formerly known as Packet One (P1)[2].

As the consequence prior to the advancement, there are electronic communication components such as Base Station (BS) that need a major upgrade and compatible with the frequency of LTE service. Antenna is one of the most important components in transmitting and receiving the signal and used in either in BS or in mobile devices. Commonly, a compact antenna is designed to be integrated with smaller mobile or any handheld telecommunication devices for supporting the latest wireless technology such as LTE [3]. This requires antenna engineers to design multiband antenna that are much more compact than the conventional antenna and at the same time is able

to operate at multiple LTE frequency bands [4]. Malaysia has introduced 3 frequencies for LTE such as 0.8 GHz, 1.8 GHz, and 2.6 GHz [2].

---

\*E-mail of corresponding author: [amirudin4854@uitm.edu.my](mailto:amirudin4854@uitm.edu.my)


Moreover, current communication devices are getting smaller and compact in size. Hence, antenna need to be smaller, operated in multi bands frequency so that the mobile device is able to handover to more than one LTE frequency when they move from micro cell to the small cell or vice versa. This requires a multiband antenna that can fit and place inside a smartphone device and can perform well using multiple LTE band. Microstrip patch antenna is one type of antennas that easy to fabricate, low profile, lightweight, cheap, and smaller [5]-[6]. Current research studies show there are lot of works on smaller antenna design for multiband frequency. Several techniques or methods can be applied on the radiator metal part of the antenna since this part contribute to the surface current of the antenna and produce electromagnetic radiation.

One of the solutions is to use microstrip antenna since it was widely chosen as the component for many wireless application [7]. With microstrip technology, multiband can be made possible in a small dimension with ease for fabrication [8]. Hence, this paper investigates and design compact multiband antenna to be used in LTE frequency band around Malaysia. Other than that, several considerations are added such as size of microwave circuitry, cost, and ease for usability as the technologies are moving towards smaller electrical component [5]

## 2. ANTENNA STRUCTURE


The design of the structure starts with the shape of a quarter-wavelength radiator antenna which then connected to the transmission line as shown in Figure 1 where it shows the front radiator part of the antenna. The white region and yellow region represent the FR4 substrate and the radiating element, respectively.

Radiator dimension is calculated according to the operating frequency wavelength and type of the substrate used as in theory. Theoretically the antenna size is directly associated to the wavelength of the required frequency and material.

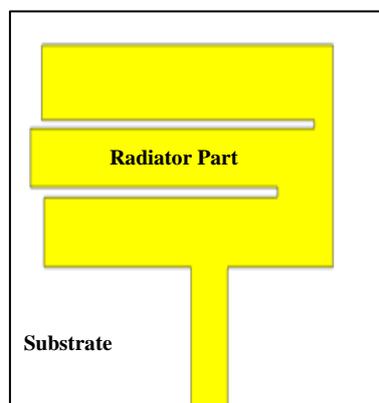

**Figure 1.** Front Radiator part

Figure 2(a) shows the front view of the antenna that can be seen consists of the substrate, feedline, and radiator while in Figure 2(b) shows the rear view of the antenna showing substrate and ground structure.

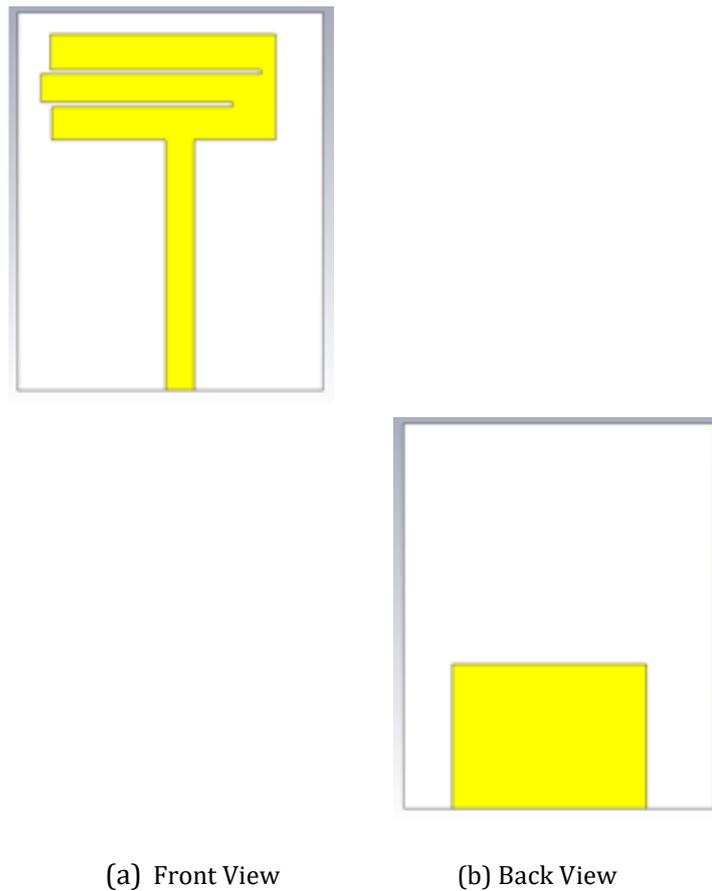**Figure 2.** (a)Front and (b) Back view of the simulated antenna

The formulas such as length, width, dielectric effective value, and effective length for the microstrip patch antenna were referred to publication in [9]-[10]. The dimension of microstrip patch antenna can be calculated using the following formulas.

Calculation of the width (W) of the microstrip patch antenna is as follow.

$$W = \frac{c}{f_0 \left( \sqrt{\frac{\epsilon_r + 1}{2}} \right)} \quad (2.1)$$

Where,  $c$  is the speed of light which is  $3 \times 10^8 \text{ms}^{-1}$  and  $f_0$  is the resonant frequency and  $\epsilon_r$  is the dielectric constant. For the effective dielectric value,  $\epsilon_{\text{eff}}$  is calculated as the formula 2.2.

$$\epsilon_{\text{eff}} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left( 1 + \frac{1}{\sqrt{1 + 12 \frac{h}{w}}} \right) \quad (2.2)$$

$h$  is the thickness of the antenna substrate, and in this paper the thickness is equivalent to the thickness of FR4. The extension of patch length,  $\Delta L$  and the length of the radiator,  $L$  are calculated using formula 2.3 and 2.4.

$$\Delta L = 0.412h \left[ \frac{(\epsilon_{\text{eff}} + 0.3) \left( \frac{w}{h} + 0.264 \right)}{(\epsilon_{\text{eff}} - 0.258) \left( \left( \frac{w}{h} \right) + 0.8 \right)} \right] \quad (2.3)$$


$$L = L_{\text{eff}} - 2\Delta L \quad (2.4)$$

Lastly is the ground plane dimension, the length,  $L_g$  and the width,  $W_g$  are calculated for the ground plane dimension. The ground plane length and width dimensions are more than the patch length,  $L$  and width,  $W$  in that order by six times thickness or height of the patch. This can be calculated by these following formulas.


$$L_g = L + 6h \quad (2.5)$$

$$W_g = w + 6h \quad (2.6)$$

The proposed antenna is designed using FR4 substrate with the dielectric constant  $\epsilon_r = 4.3$  with the thickness of 1.6 mm and loss tangent of 0.025. Figure 3 and 4 show the proposed dimension according to the desired frequency which are 1.8 GHz, 2.1 GHz and 2.6 GHz. The dimensions are further tabulated in Table 1. Two materials were used in this design, which are copper and FR4 as common material used in antenna simulation and fabrication.

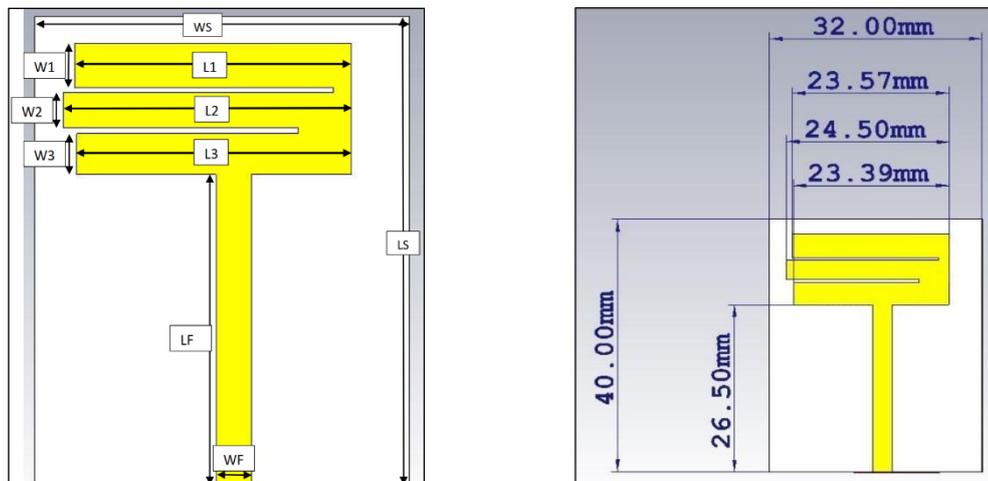

**Figure 3.** Dimension of front view elements

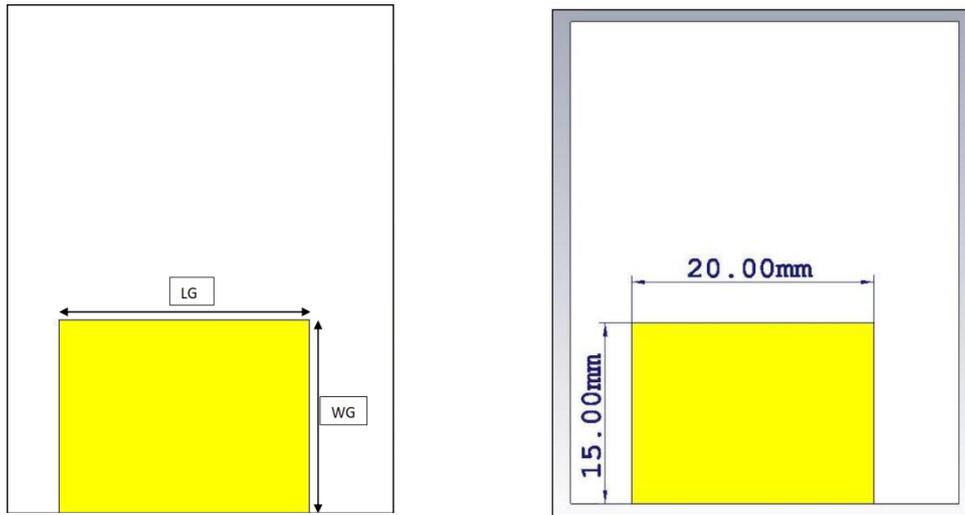

**Figure 4.** Dimension of back view element

**Table 1** Antenna Dimension

Parameter	Value (mm)
WS	32.00
LS	40.00
W1	3.80
W2	3.00
W3	3.50
L1	23.57
L2	24.50
L3	23.39
LF	26.50
WF	3.00
LG	20.00
WG	15.00

### 3. SIMULATION, PROTOTYPE FABRICATION AND MEASUREMENT

#### 3.1 Antenna Simulation

Note: Accepted manuscripts are articles that have been peer-reviewed and accepted for publication by the Editorial Board. These articles have not yet been copyedited and/or formatted in the journal house style.

The simulated reflection coefficient  $S_{11}$  as in Fig 5 at resonant frequencies of 1.8, 2.1 and 2.6 GHz are -14 dB, -23 dB and -18 dB respectively, show a good  $S_{11}$  magnitude value. The resonant frequency meets the requirement of the design which that the reflection coefficient need to be equal, or better, less than -10 dB. The simulation bandwidth also meets the bandwidth requirement for the frequency which is 40 MHz. The bandwidth that is more than 40 MHz, which are enough to cover the multi frequency range of the LTE specified. Figure 6 shows the impedance matching and Voltage Standing Wave Ratio (VSWR) at the respective resonant frequency. The impedance at resonant is between 49 to 50  $\Omega$  at resonant frequency 1.7 GHz, 2.1 GHz and 2.6 GHz respectively. To get the good impedance matching, the value should close to 50  $\Omega$  in an ideal case where the maximum power will be transferred [11]. The VSWR for the desired resonant frequencies are 1.5, 1.0 and 1.3, where these values are in the range of a good VSWR in antenna design which is under 2.

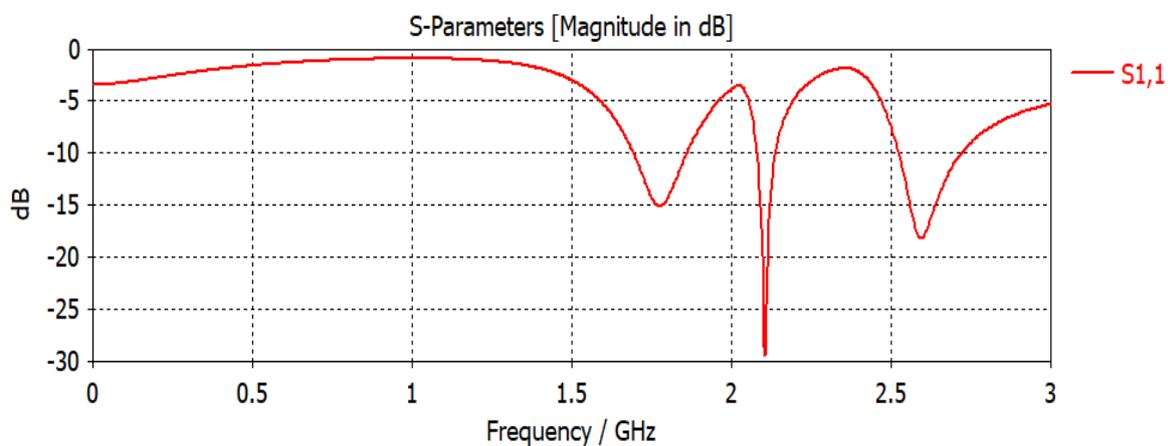


Figure 5.  $S_{11}$  simulation result

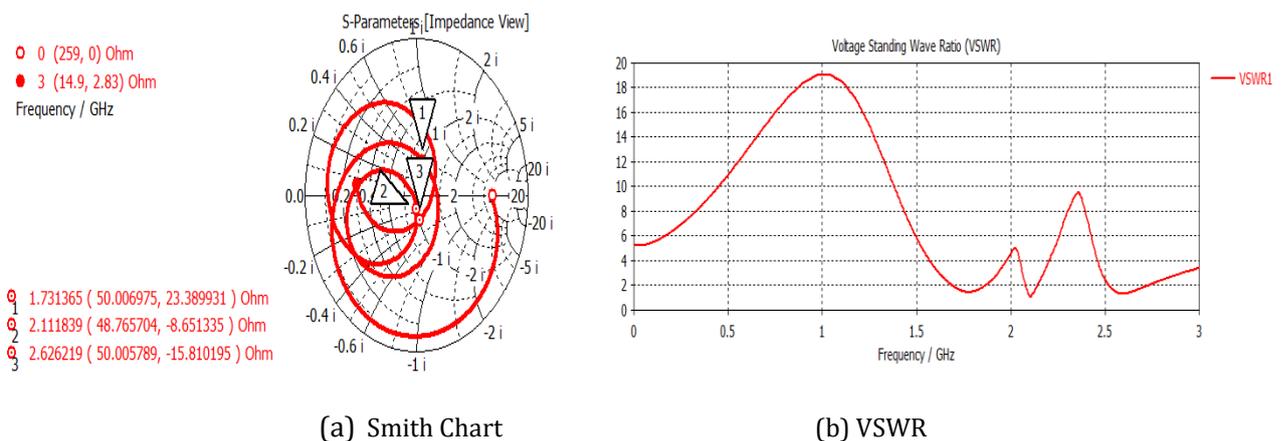


Figure 6. Smith Chart impedance and VSWR from simulation

Figure 7, 8 and 9 shows the simulated E-Field and H-Field radiation pattern for the frequency of 1.8 GHz, 2.1 GHz and 2.6 GHz respectively. From the radiation pattern, we can see that both antenna fields are omnidirectional.

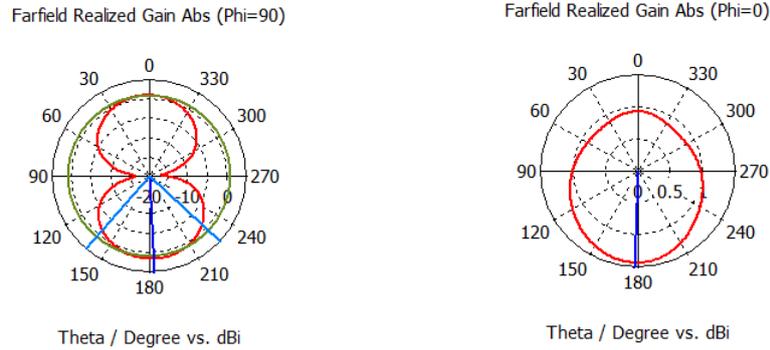


Figure 7. E-Field and H-Field Radiation pattern for 1.8GHz

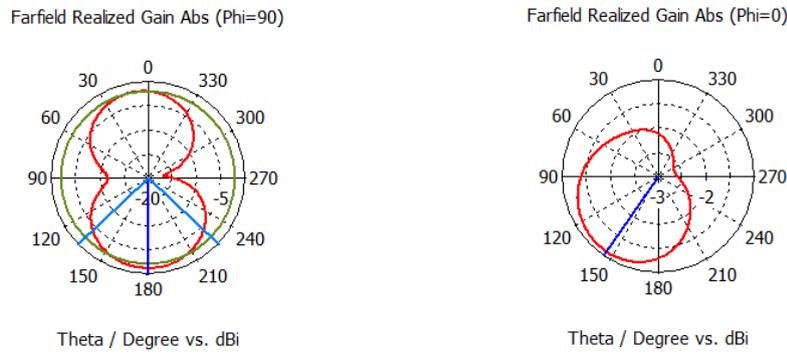


Figure 8. E-Field and H-Field Radiation pattern for 2.1 GHz


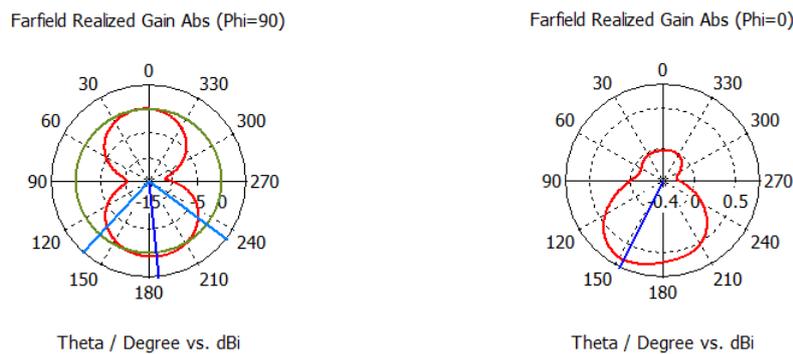


Figure 9. E-Field and H-Field Radiation pattern for 2.6 GHz

### 3.2 Fabrication, Measurement Process and Result


Note: Accepted manuscripts are articles that have been peer-reviewed and accepted for publication by the Editorial Board. These articles have not yet been copyedited and/or formatted in the journal house style.

There are three main stages in the Fabrication Process. The stages consist of UV exposure, developing and etching process. The process involves machinery and skills to be completed. Figure 10 shows the front and back view of the fabricated prototype. After the fabrication process, the antenna is measured using Vector Network Analyzer (VNA) to validate and to confirm its functioning as desired. Figure 11 shows the S11 comparison between the simulation and the prototype measurement.

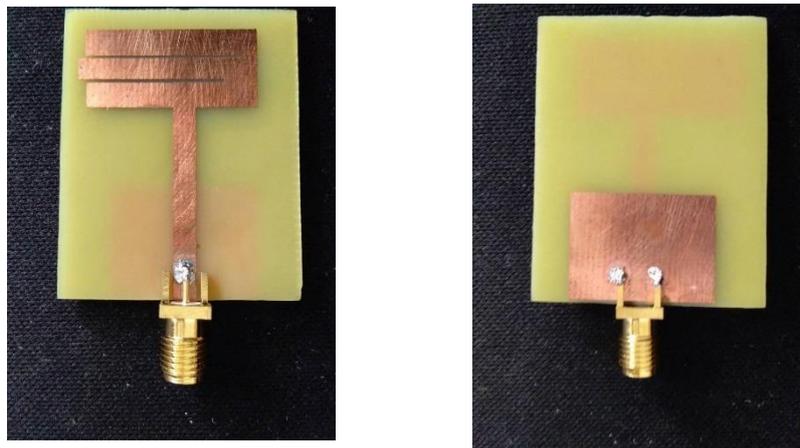

(a) Front view

(b) Back view

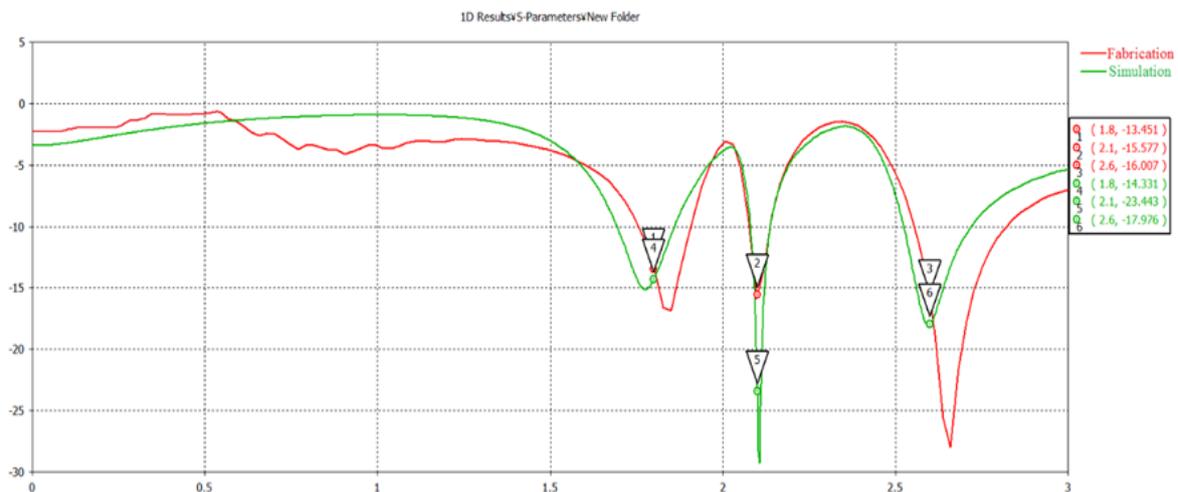**Figure 10.** (a) Front view and (b) Back View of the fabricated antenna.**Figure 11.** Comparison between simulation and measurement result


Based on the results in Table 2, the readings between simulation and measurement result were slightly inconsistent. In addition, the difference between the results may be contributed from several factors such as the in-lab fabrication process, difference in FR4 dielectric constant value, poor

soldering and SMA quality that contribute to the mismatch between the connector and feeding line and also the external noise or interference from existing communication devices during the measurement. However, the measurement results show a low discrepancy with the simulation results. Hence, the designed multiband antenna is shown can operate at 1.8 GHz, 2.1 GHz, and 2.6 GHz.

**Table 2** The S11, Bandwidth and VSWR of the antenna


Resonant Frequency	Simulation S11 (dB)	Bandwidth (MHz)	VSWR	Measurement S11(dB)
1.8 GHz	-14	170.3	1.5	-13
2.1 GHz	-23	58.2	1.0	-16
2.6 GHz	-18	196.1	1.3	-16

The measured E-Field and H-Field radiation pattern of the antenna shows the omnidirectional shapes for three different resonant frequencies as in Figure 12 and 13 respectively.

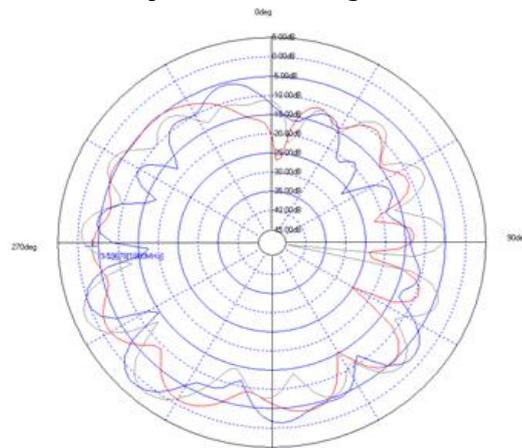

**Figure 12.** E-Field Radiation pattern measurement for 1.8 GHz (Red), 2.1 GHz (Green) and 2.6 GHz (Blue).

2.6

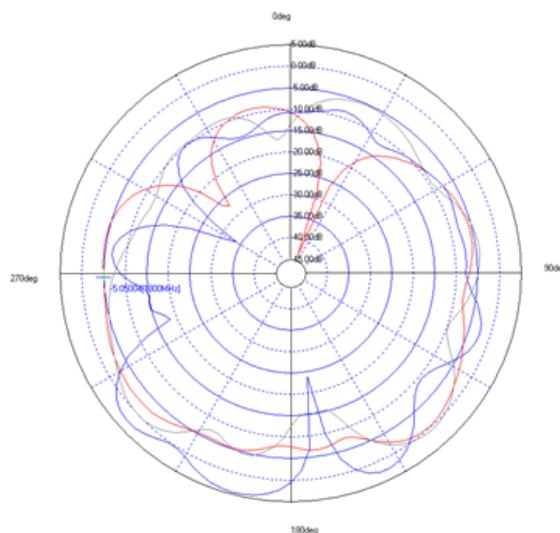

**Figure 13.** H-Field Radiation pattern measurement for 1.8 GHz (Red), 2.1 GHz (Green) and 2.6 GHz (Blue).

#### 4 DISCUSSION

Subsequently, the comparison and analysis between simulation and measurement results for the microstrip patch antenna, shows that a multiband antenna can be realized with cheaper cost and can be easily fabricated using FR4 as the insulating dielectric substrate. Several microstrip patch antenna advantages also proven as the antenna was easy and cheap fabrication process, and lightweight and smaller. Several multiband antennas for LTE have been proposed by researchers using several methods such as Multiple Input Multiple Output (MIMO) [12], reconfigurable [13] and Inverted-F antenna. However, some of the method need to consider other parameters such as isolation between ports and complicated design. Thus, the proposed design presented is suitable to be used since it is not a complicated design and only used 1 input port. So, there is no other external parameters need to be considered yet this proposed antenna can perform well according to the antenna design requirements proven by the simulation and prototype measurement.

The LTE technology has made industry focus on their research in making the device that compatible with LTE standard and current communication technology. Moreover, the multiband frequency will solve the coverage problem among and user traffic where the user can be directed to another carrier frequency. It is because most of the user's experience a very bad coverage especially when they are inside a building. This multiband antenna will improve the performance of handheld devices where it is can perform well. Telecommunication service providers or all communication service only need to adopt LTE network into their main infrastructures and can offer many LTE services such as Voice Over LTE (VoLTE) and small cell Node B by using LTE frequency band of 1.8 GHz, 2.1 GHz and 2.6 GHz. The results from both simulation and measurement proved that the multiband antenna can be designed to operate in multi LTE frequencies band according to its standard.

#### 5 CONCLUSION

Triple band antenna has been designed, simulated, and fabricated using FR4 substrate. This design can be used for LTE application that operates in 1.8 GHz, 2.1 GHz, and 2.6 GHz bands. The antenna operated at three operating frequencies 1.8 GHz, 2.1 GHz and 2.6 GHz for simulation and the corresponding S11 simulation are -14 dB, -23 dB, -18 dB and the measurement results counterpart are -13 dB, -16 dB and -16 dB respectively. The VSWR and bandwidth are in acceptable range and radiation pattern is almost omnidirectional where this type of pattern is suitable to be used in mobile devices.

#### ACKNOWLEDGEMENTS

The authors would like to thank to academic and supporting staffs of Antenna and Microwave Research Group (AMRG), Faculty of Electrical Engineering and management of Universiti

Teknologi MARA, Cawangan Pulau Pinang, Kampus Permatang Pauh and special appreciation to IETR and INSA France for the measurement facilities.

## REFERENCES

- [1] M. G. S. Association, "GSA.2015. Evolution to LTE Report," 2015.
- [2] N. A. M. A. Nur Faizah Ab Aziz, "4G Coverage in Malaysia," *Int. J. Sci. Res.*, vol. 4, no. 1, pp. 1817–1823, 2015.
- [3] A. Dadhich, P. Samdani, J. K. Deegwal, and M. M. Sharma, "Design and Investigations of Multiband Microstrip Patch Antenna for Wireless Applications," *Advances in Intelligent Systems and Computing*, vol. 904, pp. 37–45, 2019.
- [4] G. Gampala and C. J. Reddy, "Compact LTE antenna design using the theory of characteristic modes for smart phone applications," in *2013 USNC-URSI Radio Science Meeting (Joint with AP-S Symposium)*, 2013, p. 11.
- [5] V. S. T. Singh, Indrasen, "Micro strip Patch Antenna and its Applications : a Survey," *Int. J. Comput. Appl. Technol.*, vol. 2, no. 5, pp. 1595–1599, 2011.
- [6] K. H. Yeap, W. L. Yeo, K. C. Lai, T. Hiraguri, K. Hirasawa, and Z. X. Oh, "A compact E-shaped antenna with C-shaped slots and a back-patch for multiband applications," *J. Electr. Eng.*, vol. 71, no. 1, pp. 49–54, 2020.
- [7] M. A. Afridi, "Microstrip Patch Antenna – Designing at 2.4 GHz Frequency," *Biol. Chem. Res.*, vol. 2015, pp. 128–132.
- [8] A. Ibrahim, M. I. N. Ibrahim, and R. Dewan, "Dual band patch antenna for long term evolution (LTE) application in femtocell network," in *2017 7th IEEE International Conference on Control System, Computing and Engineering (ICCSCE)*, 2017, pp. 310–313.
- [9] C. A. Balanis, *Antenna Theory: Analysis and Design*. Wiley, 2015.
- [10] A. Ibrahim, N. Arina Fazil, and R. Dewan, "Triple-band antenna with defected ground structure (DGS) for WLAN/WiMAX applications," in *Journal of Physics: Conference Series*, 2020, vol. 1432, no. 1.
- [11] R. Patel, T. Upadhyaya, A. Desai, and M. Palandoken, "Low Profile Multiband Meander Antenna for LTE/WiMAX/WLAN and INSAT-C Application," *AEU - Int. J. Electron. Commun.*, vol. 102, pp. 90–98, 2019.
- [12] Q. Wu, J. Huang, J. Liu, Q. Yue, Z. Ding and Z. Liu, "A Compact 12-Port MIMO Mobile Antenna with Dual LTE Band," *2019 International Applied Computational Electromagnetics Society Symposium - China (ACES)*, Nanjing, China, 2019, pp. 1-2.
- [13] K. Diallo, A. Diallo, I. Dioum, S. Ouya and J. Ribero, "Compact Reconfigurable Antenna for NB-IoT or LTE-M and MIMO LTE2500 Applications," *2020 International Workshop on Antenna Technology (iWAT)*, Bucharest, Romania, 2020, pp. 1-4.