

Technique to Enhance the Bandwidth of a Very Thin Artificial Magnetic Conductor (AMC)

M. Abu¹, S.A.M. Ali^{1*}, S.N. Zabri¹, S.A. Anas² and N. Aziziuddin³

¹Centre for Telecommunication Research and Innovation (CeTRI),
Kejuruteraan Elektronik & Kejuruteraan Komputer (FKEKK),
Universiti Teknikal Malaysia Melaka (UTeM), Hang Tuah Jaya 76100, Melaka, Malaysia

²Industrial Design Department, Eindhoven University of Technology,
5612AZ Eindhoven, The Netherlands.

³Sistem Komputer dan Sokongan, Kolej Komuniti Segamat,
Jalan Putra1/1, Bandar Putra, 85000 Segamat Johor.

ABSTRACT

This paper introduces one of the technique to enhance the bandwidth of the Artificial Magnetic Conductor (AMC). A multilayer patch type of Frequency Selective Surface (FSS) is stacked on the AMC structure, increasing the thickness of the overall structure contribute to the lower inductivity consequently higher the bandwidth. Both AMC and FSS structures were designed by using Rogers RT5880 with the thickness of 0.254 mm and permittivity of 2.2. The bandwidth of the AMC structure is successfully enhanced from 1.97% to 3.79%. The AMC was designed at 12 GHz which can be applied for 5G applications.

Keywords: Artificial Magnetic Conductor (AMC), Frequency Selective Surface (FSS), multilayer, thin, bandwidth.

1. INTRODUCTION

Metamaterial is a structure that is designed to imitate the characteristics of specific materials that do not exist in nature such as perfect magnetic conductors (PMCs) [1]. The use of metamaterials had received wide attention in recent years because of their unique electromagnetic manner and the capability in improving gain and bandwidth, reducing back lobe radiation, wide bandwidth and also reducing the antenna size [2-8].

Several AMC design structures with applications such as Radio Frequency Identification (RFID) tags over metallic object and Wi-Fi applications was studied and compared [9-13]. Significant research had started to build around the 5G (fifth generation) wireless communication technologies. It was expected that the 5G mobile communication systems will become commercially available sometime around 2020 [14-17]. The objectives for developing 5G cellular networks include higher capacity, higher data rate, lower end-to-end latency, massive device connectivity, reduced cost, and consistent quality of experience.

In [18], the authors presented a novel AMC for 5G application. They started with a square patch shape and continued with the combination of circular and Jerusalem shape which resonate at a frequency of 18 GHz and 28 GHz respectively. Therefore, 6.98% and 2.39% of the bandwidth was achieved for the square patch and novel AMC respectively. However, the bandwidth decreased approximately 66% with the decrement of overall size around 53%.

*p021810003@utem.edu.my

G.K. Pandey et. al, [19] presented triple band AMC (3.6 GHz, 7.5 GHz, and 12.2 GHz) with coplanar waveguide fed UWB antenna (2.9 GHz to more than 13 GHz). The bandwidth of the AMC structure was observed in the range of 3.3 GHz–3.9 GHz (1st Band), 7.2 GHz–7.7 GHz (2nd Band), and 12.1 GHz–12.5 GHz (3rd Band), thus contributed to 16.67%, 6.67% and 3.27% of the useful bandwidth respectively.

In [20], the authors introduced the techniques to enhance the useful bandwidth of the AMC structure which is designed on a very thin substrate (0.13 mm). Different shapes of PEC metallization were discussed and another approaches for increasing the bandwidth was by applying the ring patch around the substrate as well as implementing the DGS ground plane. From the simulation of octagonal AMC with four rectangular slots and DGS ground plane shows that the DGS with opposite metallization exhibits more bandwidth as compared to the DGS using similar metallization shape.

This paper presents an alternative technique to enhance the bandwidth of the AMC structure. The designed starts with an AMC structure followed by stacking with the Frequency Selective Surface (FSS) in order to enhance the bandwidth. The AMC and FSS were designed to operate at 12 GHz for 5G applications by using a very thin substrate which is Rogers RT5880 with the thickness of 0.254 mm and permittivity of 2.2. should follow.

2. METHODOLOGY

The basic geometric configuration of AMC is based on square structure as shown in Figure 1, thus assigned impedance equal to that of parallel LC circuit and has high surface impedance at resonant frequency. The inductance arises from the current flowing between the patches through the metallic vias while the capacitance arises from the proximity of adjacent patches.

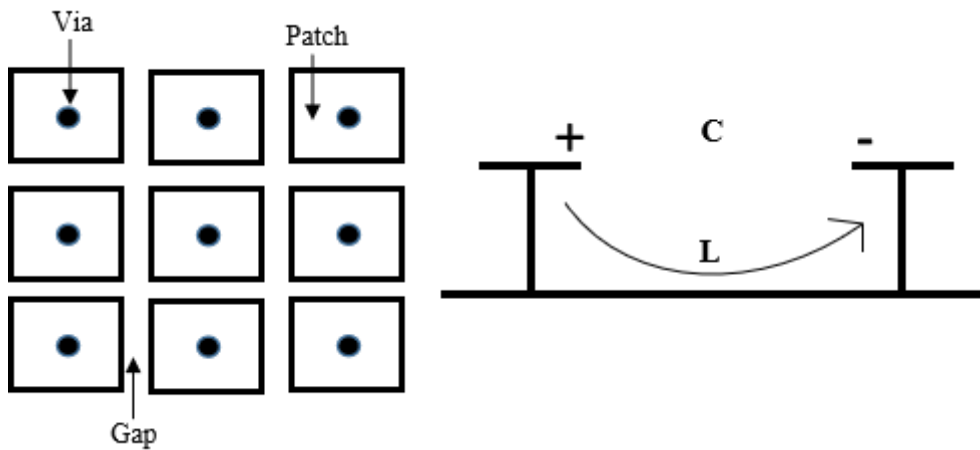


Figure 1. Basic AMC structure

As in [18-20], the inductance (L), capacitance (C), frequency response (fr) and bandwidth (BW) of the equivalent circuit for mushroom EBG structure are:

$$L = \mu_0 h \quad (1)$$

$$C = \frac{W \epsilon_0 (1 + \epsilon_R)}{\pi} \cosh^{-1} \left(\frac{2W + g}{g} \right) \quad (2)$$

$$f_r = \frac{1}{2\pi\sqrt{LC}} \quad (3)$$

$$BW = \frac{1}{\eta_o} \sqrt{\frac{L}{C}} \quad (4)$$

where η_o = impedance, ϵ_o = permittivity, μ_o = permeability of free space, w = patch width and g = the gap between adjacent patches.

The AMC consists of patch, substrate and ground layer. Meanwhile, the FSS differs to AMC in term of layers configuration. The FSS structure only consists of patch and substrate layers. FSS also known as AMC without ground plane while AMC also known as FSS with ground plane. The patch and ground layers used the Perfect Electromagnetic Conductor (PEC) with the thickness of 0.035 mm. Meanwhile, the substrate used a 0.254 mm thick Rogers RT5880.

The square shape of the substrate was introduced for both AMC and FSS structure. T T-shaped with a circle at the center for the AMC patch is shown in Figure 2. While all the parameters for the square shape AMC are shown in Table 1.

Basic structure was introduced for FSS as shown in Figure 3. The 8.5 mm square shape substrate with the square ring for the patch. Table 2 shows the parameter for the square shape of FSS at 12 GHz.

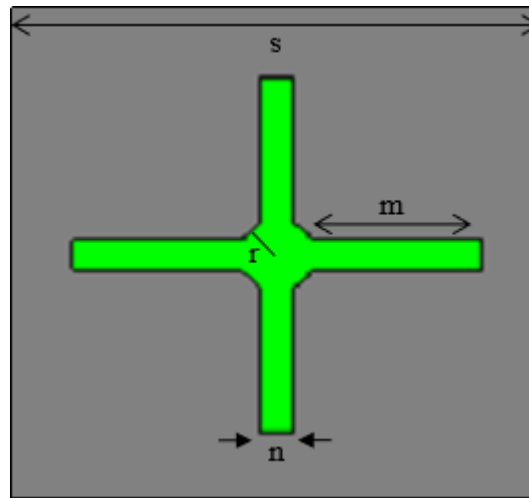


Figure 2. Dimension of AMC structure designed at 12 GHz

Table 1. Parameters of square AMC

Variable	Parameter (mm)
Square substrate, s	6.13
Length of T-shaped, m	1.43
Width of T-shaped, n	0.33
Radius of center circle, r	0.41

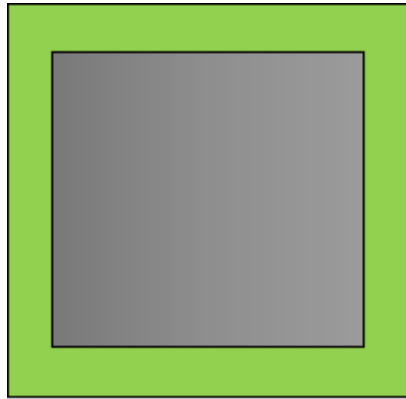


Figure 3. Dimension of AMC structure designed at 12 GHz

Table 2. Parameters of square FSS

Variable	Parameter (mm)
Square substrate, s	8.50
Square patch, m	7.50

Then, AMC with multilayer patch type FSS was introduced in order to enhance the AMC bandwidth. The FSS structure was stacked on the top of AMC structure as shown in Figure 4 as in side and 3D views. The structure consists of FSS and AMC backed by a ground plane. The total thickness of the integrated structure is around 0.61 mm.

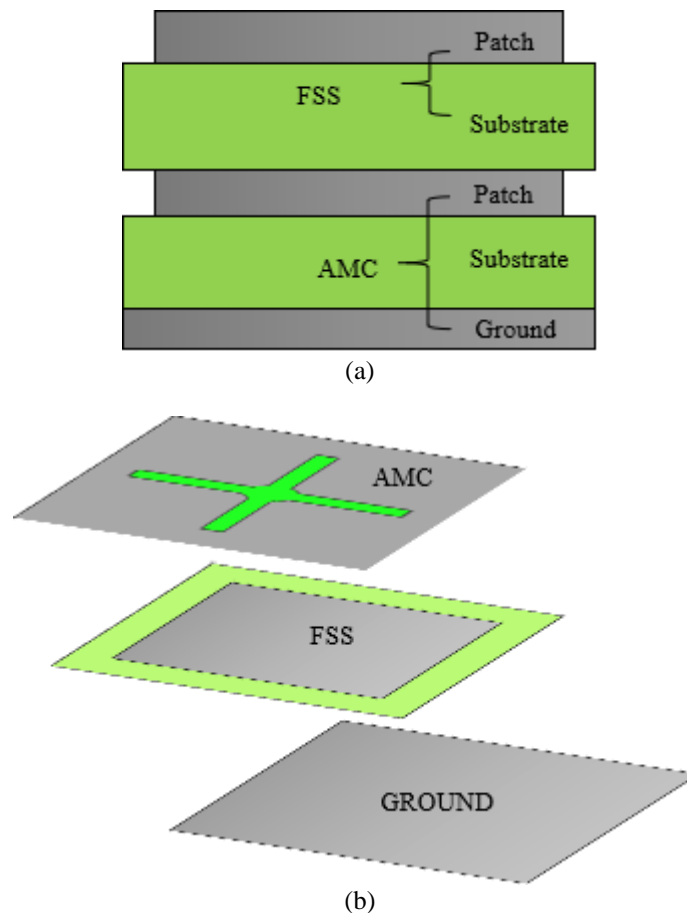


Figure 4. Dimension of AMC with multilayer patch type FSS; (a) side view and (b) 3D view

3. RESULTS AND DISCUSSION

The reflection magnitude and phase of the AMC structure are shown in Figure 5. It is shown that the reflection magnitude of the AMC is -0.69 dB which is almost zero reflection, thus contributed to the best reflector and the structure can be applied as a good and reasonable ground plane for the low profile antenna.

The AMC surface varied continuously from 180° to -180° relative to the frequency, and were equal to zero degrees nearly at 12 GHz, meaning that all the AMC were successfully realized. By using equation 5, the bandwidth of the AMC was calculated based on the reflection phase at $\pm 90^\circ$. The AMC structure exhibit 90° and -90° at 11.89 GHz and 12.13GHz of reflection phase respectively, thus contributes to 1.97% bandwidth.

$$\text{bandwidth} = \frac{f_{u(90^\circ)} - f_{L(90^\circ)}}{f_{r(90^\circ)}} \quad (5)$$

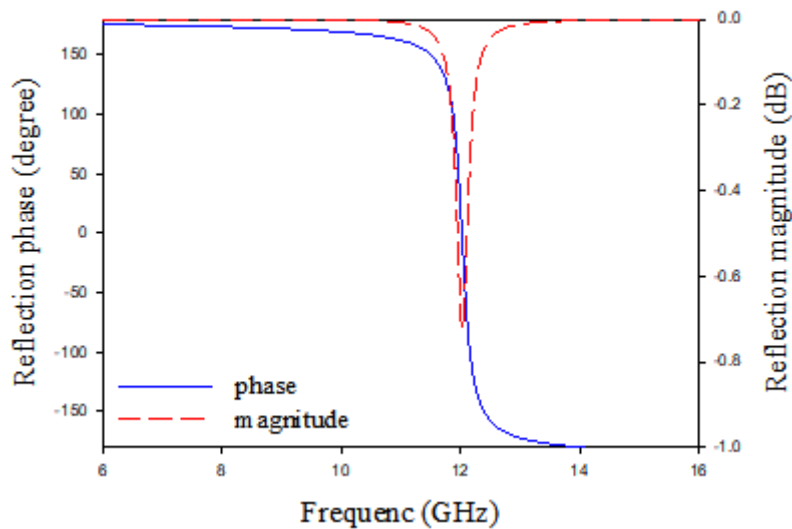


Figure 5. Reflection magnitude and phase of AMC at 12 GHz

Figure 6 shows the transmission and reflection coefficient of the FSS structure at 12 GHz. The reflection of the structure is almost zero which is around -0.03 dB, while the transmission is -47.03 dB. Based on -10 dB transmission, the frequency lies between 5.52 GHz to 16.43 GHz, thus contributes around 10.91 GHz of bandwidth.

In order to increase the bandwidth, the inductivity of the cell must be decreased. From equation (3) the inductance, L can be decreased by increasing the thickness, h of the substrate. So, the FSS structure is stacked at the back of AMC to increase the thickness of the overall structure. As shown in figure 4, the 3D view of stacked AMC and FSS which consist of one ground plane and 2 two pairs of substrate and patch structure. The FSS structure was stacked on the top surface of the AMC and the total thickness is 0.61 mm. Initially, the bandwidth of the AMC was 1.97%.

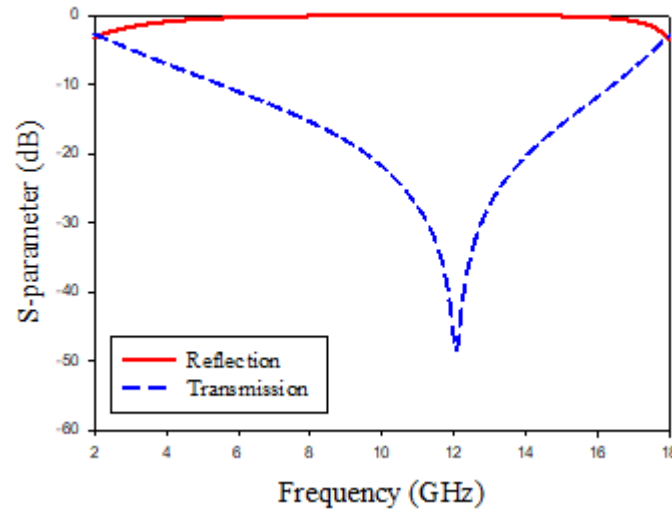


Figure 6. Transmission and reflection of FSS at 12 GHz

Figure 7 shows the reflection phase of the AMC with multilayer patch type FSS structure. At 12 GHz, the reflection phase is 0° . Therefore, the reflection magnitude of the AMC is -0.69 dB which almost zero reflection. Meanwhile, at $\pm 90^\circ$ reflection phase, the frequency lies between 12.23 GHz to 11.77 GHz, thus contributes to 3.79% bandwidth. The integrated structure is successfully increased the AMC bandwidth approximately to 1.82%.

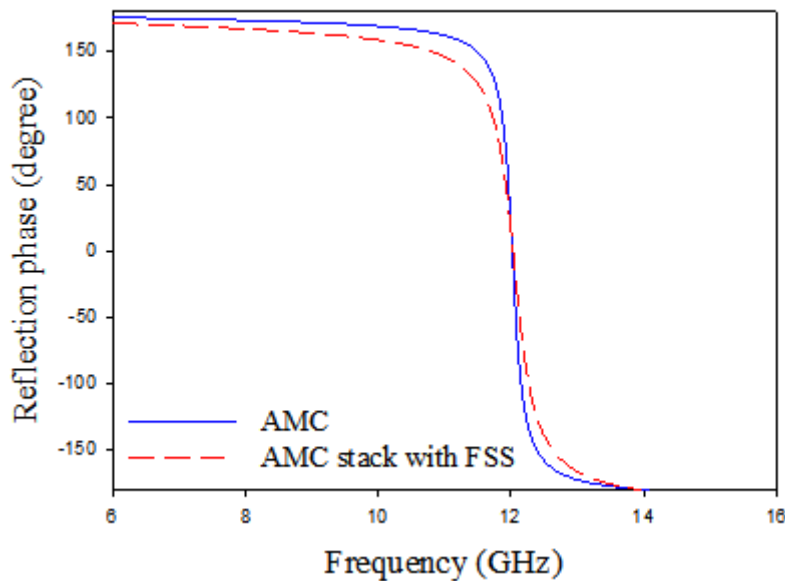


Figure 7. Reflection phase of AMC with multilayer patch type FSS

Then, the second FSS structure is stacked on the top of the AMC with multilayer patch type FSS. The bandwidth increased to 6.92 % with the overall thickness of 0.90 mm. Table 3 shows the bandwidth increment with the multilayer patch type FSS. Meanwhile Figure 8 shows the relationship between the bandwidth with the overall thickness of the structure. Noted that the bandwidth increment is directly proportional with the overall thickness. Increasing the thickness of the overall structure contribute to the lower inductivity consequently higher the bandwidth. Fortunately, for this case, an AMC with double FSS layers leads the bandwidth

enhancement is still considered as a thin structure (thickness < 1 mm), due to an ultra-thin substrate thickness.

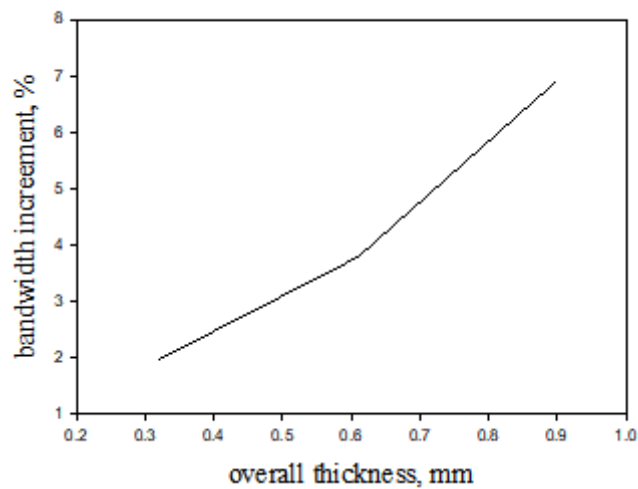


Figure 8. Relationship between bandwidth and total structure thickness

Table 3 Bandwidth increment with the multilayer type FSS

	Bandwidth (%)	Overall thickness (mm)
AMC	1.97	0.32
AMC with FSS	3.79	0.61
AMC with double FSS	6.92	0.90

4. CONCLUSION

The technique to enhance the useful bandwidth of the Artificial Magnetic Conductor (AMC) was successfully presented. A multilayer patch type of FSS is stacked on the AMC structure, increasing the thickness of the overall structure contribute to the lower inductivity consequently higher the bandwidth. Both AMC and FSS structures were designed by using Rogers RT5880 with the thickness of 0.254 mm and permittivity of 2.2. The bandwidth of the AMC structure is successfully enhanced from 1.97% to 3.79%. The AMC was designed at 12 GHz which can be applied for 5G applications. .

ACKNOWLEDGEMENTS

The authors wish to thank the Center for Research and Innovation Management (CRIM) and Zamalah Scheme of Universiti Teknikal Malaysia Melaka (UTeM) for the support of this work.

REFERENCES

- [1] Abu, M., Hassan, H., Zin, M. S. I. M., Ali, S. A. M. Design of Single-Band Geometric Pattern Artificial Magnetic Conductor. *ARPN Journal of Engineering and Applied Sciences*, vol **11**, issue 5 (2016).
- [2] Munawwar, R. F., Abu, M., & Ali, S. A. M. 8 connected branches AMC-EBG and FSS for Circle Connected Dipole at 5.8 GHz. *International Journal of Applied Engineering Research*. vol **10**, issue 1 (2016) pp.6932-6939.
- [3] Abu, M. and Ali, S. A. M. Performances of an Ultra-Thin AMC and FSS for 5G Applications. 2018 International Conference on Engineering, Applied Sciences, and Technology (ICEAST), (2018).
- [4] Ali, S. A. M. and Abu, M. Performances of Flexibel Antenna with Ultra-Thin AMC and AMC with Multi-Layer FSS. 2018 International Conference on Engineering, Applied Sciences, and Technology (ICEAST), (2018).
- [5] Hamad, E. K. I. and Nady, G. Bandwidth Extension of Ultra-wideband Microstrip Antenna using Metamaterial Double-side Planar Periodic Geometry. *Radio Engineering*, vol **28**, issue 1 (2019) pp.25-32.
- [6] Adel, Y. I. Ashyap, Z. Z. A., . Dahlan, S. H., Majid, H. A., Kamarudin, M. R., Alomainy, A., Raed, A. A., Jamal, K. and James, M. N. Highly Efficient Wearable CPW Antenna Enabled by EBG-FSS Structure for Medical Body Area Network Applications. *IEEE Access*, (2018) pp.77529-77541.
- [7] Surajit, K., Ayan, C., Sanjay, K. J. and Susanta, K. P. (2018). A Compact Umbrella-Shaped UWB Antenna with Gain Augmentation using Frequency Selective Surface. *Radio Engineering*, vol **27**, issue 2 (2018) pp.448-454.
- [8] Kamardin, K., Rahim, M. K. A., & Hall, P. S. Textile Diamond Dipole and Artificial Magnetic Conductor Performance under Bending, Wetness and Specific Absorption Rate Measurements. *Radio Engineering*, vol **24**, issue 3 (2015) pp.729–738.
- [9] Annandarajah, T., Tan, H. T., Hussin, E. E. and Abu, M. Design and Simulation of RFID Tag with Artificial Magnetic Conductor at 0.92 GHz for Green Projects. *International Conference on Computing, Management and Telecommunications (ComManTel)*, (2015).
- [10] Aye, E. T., & New, C. M. High Gain Fabry-Perot Cavity Antenna for Ka RFID Applications. 2016 17th International Conference on Sciences and Techniques of Automatic Control and Computer Engineering (STA), (2016).
- [11] Necibi, O., Hamzaoui, D., Vuong, T. P. and Gharsallah, A. A Novel RFID-HIS-PRS Reader Antenna for the Millimeter Wave Band 30 GHz. *Microwave and Optical Technology Letters*, vol **57**, issue 8 (2015) pp.62–64.
- [12] Dahlman, E, Mildh, G., Parkvall, S., Peisa, J., Sachs, J. & Selén, Y. 5G Radio Access. *Ericsson Rev.*, vol **91**, issue 6 (2014) pp.42–48.
- [13] Roh, W. Millimeter-Wave Beamforming as an enabling Technology for 5G Cellular Communications: Theoretical Feasibility and Prototype Results. *IEEE Communication Mag.*, vol **52**, issue 2 (2014) pp.106–113.
- [14] Gupta, A., & Jha, R. K. A survey of 5G network: Architecture and Emerging Technologies. *IEEE Access*, (2015) pp.1206–1232.
- [15] Prakash, P., Abegaonkar, M. P., Basu, A. & Koul, S. K. A W-Band EBG-Backed Double Rhomboid Bowtie-Slot On-Chip Antenna. *IEEE Antennas and Wireless Propagation Letters*, (2019).
- [16] Zainol, N., Zakaria, Z., Abu, M. and Yunus, M. M. A 2.45 GHz Harmonic Suppression Rectangular Patch Antenna with Circular Polarization for Wireless Power Transfer Application. *IETE Journal of Research* . vol **64**, issue 3 (2017).

- [17] Muhamad, M., Abu, M., Zakaria, Z., & Hassan, H. Novel Artificial Magnetic Conductor for 5G Application. Indonesian Journal of Electrical Engineering and Computer Science, vol **5**, issue 3 (2017).
- [18] Abu, M., Hussin, E. E., & Othman, A. R. Investigations of Triple Band Artificial Magnetic Conductor Back Plane with UWB Antenna. Microwave and Optical Technology Letters, vol **58**, issue 8 (2016).
- [19] Abu, M., Hussin, E. E., & Othman, A. R. Design of 0.92 GHz Artificial Magnetic Conductor for Metal Object Detection in RFID Tag Application with Little Sensitivity to Incidence of Angle. Journal of Theoretical and Information Technology, vol **60**, issue 2 (2014) pp.307-313.