

Driving Monitoring System Application with Stretchable Conductive Inks: A Review

Ameeruz Kamal Ab Wahid^{1,2}, Mohd Azli Salim^{2,3,*}, Nor Azmmi Masripan², Adzni Md. Saad², Dan Dobrota⁴, Ghazali Omar^{2,3}, Mohd Nizam Sudin² and Azmi Naroh⁵

¹Department of Mechanical Engineering, Politeknik Sultan Azlan Shah, Sehrang Stesyen, 35950 Behrang, Perak, Malaysia

²Fakulti Kejuruteraan Mekanikal, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia.

³Advanced Manufacturing Centre, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia.

⁴Faculty of Engineering, Lucian Blaga University of Sibiu, Sibiu 550024, Romania.

⁵Jabatan Kejuruteraan Mekanikal, Politeknik Ungku Omar, Jalan Raja Musa Mahadi, 31400 Ipoh, Perak, Malaysia.

ABSTRACT

Nowadays the automotive industry is moving towards developing a system connected vehicle parameters which can be monitored the driver's behaviour before driving. Most drivers lose focus and emotionally distracted while driving are caused by fatigue, drowsiness and alcohol and so will result in a traffic accident. The device or equipment to detect driver's health before driving has always been problems in terms of the efficiency of a system used especially on the cable connecting the equipment. Stretchable conductive ink (SCI) via electronic devices has been widely applied in various industries such as fabric, health, automotive, communications and etc. The flexibility allows a circuit to be placed on an uneven surface or constantly changing. However, until today still has not been proven effective use of stretchable conductive ink in the automotive industry. The present driver monitoring system cannot integrate many of the driver's health level tracking features at one time. The combination of driver monitoring system method with stretchable conductive ink (SCI) sensors layout design can be used to prevent road accidents as a result of driver behavior and will make driving monitoring system more effective with soft substrates technology that has the advantage of geometric deformation based on appropriate shapes.

Keywords: driver monitoring system, driver behavior, conductive ink, substrates.

1. INTRODUCTION

Driver's is the main character to avoid accident occurrences. Most drivers are not suitable for long-distance driving because of health problems or fatigue after a long journey. Among the main causes of driver loss of focus, assessment ability, and impaired emotional performance are the driver's inability to control the vehicle and will lead to even worse traffic accidents are caused by fatigue, alcohol and distraction on the road [1]; [2]. Statistics show that the main cause of the fatalities and injuries in traffic accidents is a reduced level of supervision in drivers [3]. The device or equipment to detect driver's health before driving has always been problems in terms of the efficiency of a system used especially on the cable connecting the equipment. There are some multiple sensors capable of capturing human behavior, health data and feedback to avoid accident. The combination of printed devices with other forms of stretchable electronics will offer unexpected opportunities in energy, healthcare, defense, and display where high performance under severe mechanical strain is essential [4]. However, until today still has not been proven effective use of stretchable conductive ink (SCI) in the automotive industry that involves many aspects of driving safety in difference driver behavior due to static and dynamic testing.

*azli@utem.edu.my

To do so, this study will be covered the lacking and finally to discover the knowledge. Figure 1 shows that death statistics from road accidents are still high. This shows that the steps taken by lowering the death toll from road accidents are still unsuccessful. government road safety campaigns and driver awareness of hazards without prioritizing safety measures while driving makes car manufacturers improve aspects of the car safety system especially driver behavior.

Government authorities in some countries also emphasize the use of driver behavior monitoring systems in addition to reducing theft and misuse of equipment. Responsible drivers will prioritize the use of driver behavior monitoring systems for safer driving and save on fuel costs and more green.

1.1 Driver Monitoring System

Monitoring driver behavior is one of the ways to avoid accidents caused by negligence or fatigue due to long journey driving. To avoid drowsiness while driving, less than 3 hours of driving a day is more appropriate for a normal driver [5]. According to [6], severe drowsiness occurred after at least 18 hours of continuous wakefulness. Most of the accidents occur because of dangerous driving or driver losing control due to fatigue. According to [7], there are four categories driving behavior which is normal behavior, drunk behavior, fatigue behavior, and reckless behavior. For traffic safety and intelligent driving, while collecting data is crucial during braking, blinking and even pressing the accelerator correlated with driving behavior [8]. When the driver is drowsy, they intend to look away from the forward roadway but more likely to look toward their lap [9].

Basically, 80 percent of road accidents are closely related to driver behavior [10]. This is because of the fatigue and drowsiness factor which causes the driver to lose focus and contribute to the accident. Vehicle accidents cause fatalities and injuries, financial losses and lost productivity which also result in legal and insurance costs. The vehicle monitors as usual only to the driver of the vehicle and without communication of any result, problem and/or damage will occur to the vehicle at the remote site for troubleshooting, diagnosis or tracking for data mining [10]. Many people don't even realize they are high-risk drivers by reckless behavior, like speeding, sudden acceleration and swerving through lanes put other drivers at risk. Dozens of surveys show that recognizing dangerous driving behavior can be a strong motivator for drivers to improve their behavior. Also, when people see the direct relationship between reckless driving or they know that their behavior is being monitored, their driving improves. Monitoring driver behavior can be a silver bullet and this is inadequacies in how driver distraction, alcohol and drug impairment, and uncorrected or defective eyesight investigated by law enforcement [11].

In fact, solutions to curb bad driving are being used by several companies as a part of their Fleet Management Systems (FMS). Transportation companies track, benchmark and train their drivers as well as create more economical and environmentally efficient fleets. They can also be used to maintain corporate and regulatory compliance. Insurance companies use devices and applications to track driver behavior to reduce their costs on insurance settlements and offer their customers more flexible coverage terms. To determine potential driver fatigue, there are devices or systems that can detect and track the driver's face, eyes, mouth, eye blinking, and cap openings [12]. There are common tools that are installed on vehicles with software to monitor and analyze the device logs to tracking driver's behavior by using plug & play devices like GSM/GPS OBDII tracking devices, CANBUS devices, RFID devices, and cameras. The systems software can be either web-based or cloud-based. Numerous vision systems have been developed to detect driver behaviors to drive safety and most existing systems are using direct camera mounting to the driver's face to capture high-resolution images [13]. Some companies use ready-made solutions and some develop driver behavior monitoring systems that are customized for their fleet.

There are many safety features related to driver behavior that occurs in the vehicle security system at present. Most of the safety features for monitoring driver behaviors are (a) Facial Tracking: Face Recognition, Emotion Recognition; (b) Eye-Tracking: Measuring Drowsiness & Fatigue; (c) Biometrics: Alcohol Detection; (d) Biometrics: Heart-Rate Monitoring and; (e) In-Cabin Intelligence: Occupant Monitoring [106].

Highly Automated Driving (HAD) is a new driver monitoring feature and soon will be commercially available [14]. Human factors issues like the influence of driver state can have a critical impact on the success of this driving paradigm, road safety and as well as assessment of their cybersecurity and data privacy due to the increased variety of software and communication interfaces used. HAD concept, the human driver still retains the responsibility to resume vehicle control in a situation where the automation cannot handle. The effect of HAD functions on road safety is essential for the homologation of such complex systems [15].

1.2 Printed Circuit

The printed circuit **is** an electrical device in which the wiring and certain components consist of a thin coat of electrically conductive material applied in a pattern on an insulating substrate by any of several graphic arts procedures.

1.2.1 Printed Circuit Boards (PCB)

Printed circuit boards or PCBs, has become essential to people's daily routines which is a vital role in the modern-day as technology and essentially a foundation as they are used in almost everything electronic or electrical. The PCBs also come in various configurations which allow them to serve different purposes and provides various capabilities. PCB substrates and modules contain conductor effects with large cross-sections and/or massive copper and ceramic structures to allow the required heat dissipation [16]. Nowadays, every industry uses the PCBs and continues to evolve into new industries and applications. PCBs are the major functional centers of most electronics in the modern world. Circuit boards connect components to one another through a series of related circuits. Commercial Printed Circuits was introduced early 20th Century using one or more patterned metal foil layers. Commercialization of Radio sets, then other electronics made PCBs commonplace by the mid-1950's. Copper has been the metal of choice for PCBs. The standard conductors in a PCB is using printed and etched foil (subtractive) and plated (additive) interconnecting vias. Dielectric materials are typically composites of various resins and a reinforcing fabric with the exception of flexible circuits. The PCB can be very complex handling everything from power circuits to high speed interconnects (transmission lines) between processors with patterning and combining in a layered structure.

The principles for using both subtractive and additive conductor formation has been the same for decades because the PCBs are becoming ever more complex in density and layer count. PCB designers need to consider many of these effects for higher frequencies, for example, minimize D_k , copper roughness and thickness variations as it can all negatively impact performance in their design in order to be aware of various tradeoffs with different types of PCB materials and processes. Common-mode noise can affect the PCB signal integrity (ST) and power integrity (PT) and result in unintentional emission that lowers the performance of nearby devices [17]. The conductors, etched copper are remaining unchanged while new dielectrics like Low loss materials continue to increase in use. The basis of the electronics industry, printed circuit boards, is a technological waste of difficult disposal whose recycling is complex and expensive due to the diversity of materials and components and their difficult separation [18]. The large amount of PCB waste generated annually increases with its toxic nature and the high availability of precious metals in its composition reinforces problems related to PCB waste management and recycling

[19]. The massive disposal of waste electrical and electronic equipment (WEEE) generates a large stream of waste printed circuit board (WPCB) into municipal solid waste, generated in large quantities annually [20]. Electronics contributes significantly to the medical application or health-care industry, functioning as diagnostic, monitoring and treatment devices. These electronic devices in medical applications continue to grow as electronics evolve to become more efficient and dense, leading to endless new possibilities. PCBs are highly specialized in order to fit the unique constraints of medical devices within the medical industry. Flexible base materials in medical PCBs also has been made to allowing PCB to flex during use, which can be essential for both internal and external medical devices.

1.2.2 Printed Electronics

Printed electronics is one of the fastest-growing technologies today and is become very important to several industries including healthcare, aerospace, media, and transit. Printed electronics technology originally to emerge as a potential low-cost replacement to its complementary technology, silicon-based electronics. As the substrates grow thinner, it is enough to be integrated into existing production lines because the printed materials become thin, light, and flexible. Printed electronics objectives are not only to be cheaper alternatives by replacing the individual electronic layers but also to develop complex materials that deliver additional functionalities which a two-component solution that controlling the viscosity can be used to produce a self-assembled structure based on the affinity of the solution components to each other [21]. Printed electronics used an all-encompassing term for the printing method to create electronic devices by printing on a variety of substrates. Originally, printed electronics related to organic or plastic electronics used one or more inks made of carbon-based compounds. Printed electronics are being used to form flexible keyboards, antennas, electronic skin patches, and more as demand for wearable devices and thinner electronics expands. According to [22], printed electronics plays a critical role in facilitating widespread flexible electronics and more recently stretchable electronics.

According to [23], wearable electronics applications numerous challenges is the unobtrusiveness of the device which the key technology to minimize obtrusiveness is stretchable electronics. Stretchable electronics is a device that represents an emerging class which can be compressed, twisted and adhered to a very complex shape and the compliances of mechanical and electrical stretchable electronics can pave the use of health care, entertainment, and energy [24]. The main challenge of materials for making stretchable printed electronics is to develop a printable conductor or electrode [25]. Stretchable conductive ink via electronic devices has been widely applied in various industries such as fabric, health, automotive, communications and etc. The flexibility allows a circuit to be placed on an uneven surface or constantly changing. Stretchability gives an advantage providing pervasive and unobtrusive sensing and display applications because of the stretchable platform is perpetually exposed to cyclic motion and deformation [26].

Most organic materials are generally flexible, non-stretchable, which is a key mechanism needed for prosthetics, artificial intelligence, robotic systems, personal health monitoring, biocompatibility, and communication devices [27]. The same conductivity over severe bending cycles demonstrated a high electrical conductivity after thermal reduction using graphene-based patterns printed on plastic substrates [28] According to [29], the routes to integrated circuits provided by advances in mechanics and materials offer the electrical properties of conventional, rigid wafer-based technologies but with the ability to be stretched, compressed, twisted, bent, and deformed into arbitrary shapes. Because of these structures, the flexible electrical circuit must insufficiently be thin form and by virtue of bending strains that decrease linearly with thickness.

Nanoparticle inks can be produced in large quantities, dispersed in high concentrations and produce relatively good electrical conductivities [30]. Most driver seat sensor systems composed of ink and a thin film circuit and provides a wiring pattern on the top surface of the substrate. All wiring pattern consists of pairs of wires and each pair of wires defines a capacitive element which is connected to the detector circuit by a connecting wire. The rapid development of the use of electronic devices today requires the conductive matrix to be more flexible and stretchable. Stretchable and conductive materials have been widely used for electronic and healthcare equipment. Flexibility and expandability are the main features of the SCI while maintaining high conductivity levels. According to [31], conductive ink is simple and cost-effective, which is suitable for flexible electronics.

2. MATERIALS

Nowadays the present printed circuit boards (PCBs) manufactures use relatively high cost due to the complex and expensive techniques. To overcome these problems, by using various conductive fillers such as gold, platinum, carbon nanotube, silver nanoparticles, organic conductive polymers and graphene that has been used in printed electronics market are capable to substitute the PCB technology and reducing the manufacturing cost. For both additive and subtractive conductor processing, there are complex manufacturing infrastructure for PCB [32]. To produce a sensor system that uses a wire connection will involve other equipment such as the wire connection boards. The board has a physically fragile or easily broken when subjected to high pressure. There are important new electronic features such as low manufacturing costs, long-term durability, environmentally sustainable production methods, recycling, lower energy consumption, and higher efficiency, and electronic integration as part of other structures [33].

Graphene has been a major source of research with many desirable properties including high electrical conductivity, mechanical strength, and elasticity [34]. The technology of the internet of things (IoT) can be dominated by the inks based on graphene because of the low cost of the ink and applied directly on materials like textile and paper [35]. The use of conductive nanomaterials for printed electronics must overcome two major challenges: first, similar to bulk metal, the printed patterns need high electrical conductivity and second, the nature of the substrate material is not affected especially for plastic electronics, need to achieve high electrical conductivity under relatively light conditions [36]. Graphene strain sensors have the ability to detect various types of strain caused by stretching, bending, and torsion, which are required for sensors to detect human body motions [37]. In order to achieve high conductivity, there is a wide selection of conductive materials that can be used but there are also disadvantages. Gold has the advantage of being non-oxidative and making it ideal for coating and interfacing [38]. Due to the high cost of gold, it is restricted to wider use [39]. According to [40], silver disadvantages are susceptible to electromigration which its widespread use is barred.

Due to the high cost of materials, copper, aluminum, and nickel are cheaper alternatives but the disadvantages of these materials are easily oxidized in the air which form an insulating barrier on its surface [36]. Carbon is another conductive material in the form of graphite, carbon black and carbon nanotube (CNT) which it is rolled graphite into single or multiwall cylinders [41]. The advantage of CNT is can act as either metal or semiconductor depending on the chirality and it can withstand in harsh conditions [30].

2.1 Substrates for Conductive Circuit

Modern electronics are based on the integrated circuit, which is an assembly of millions of interconnected components such as resistors and transistors that are built upon a tiny chip of silicon. These circuits depend on insulating materials in order to maintain their reliability that

can serve as substrates which is the bases of the microscopic electronic components and their connections are built and packages which is the structures itself sealed a circuitry from the environment and make it a single, compact unit.

2.1.1 Substrates for PCB

The PCBs consist of two basic parts: a substrate (the board) and printed wires (the copper traces). The substrate provides a structure that physically holds the circuit components and printed wires in place and provides electrical insulation between conductive parts. Compared to the traditional direct bonded circuit (DBC), the PCB substrates are better electrical properties and mechanical soundness [42]. The advancement in the speed and function of components used on PCBs is the availability of materials for PCB substrates compatible with this product and its process requirements [43]. The PCB materials have two purposes: to conduct electricity and to provide insulation between conducting layers of copper. The materials of a printed circuit board (PCB) contain the transmission lines and components that enable radiofrequency/microwave circuits. It is important how to know the success or failure of the PCB; the materials impact thermal behavior, as well as the electrical and mechanical characteristics of the circuit. PCBs are generally made of solder mask, silkscreen, copper and substrate. There are many options to choose from substrates.

- i. **Hard/rigid PCB materials:**
These PCBs are made out of a solid substrate material that prevents the board from bending. For example, a computer motherboard, perhaps the most common application for a rigid PCB. The motherboard is a multilayer PCB which designed to allocate electricity from the power supply while and enabling communication between all of the computer's parts, such as CPU, GPU, and RAM [108]. For the device's lifespan, hard or rigid materials are used whenever the PCB has to retain the shape it was set up to be. Hard circuit materials are typically ceramic based.
- ii. **Substrate: Soft/flexible materials:**
Plastic is often being used to enable a PCB to flex and move. Like hard or rigid PCBs, flexible PCBs can be made in single, double or multilayer formats. Soft/flexible materials can be folded over edges and wrapped around corners. Flexible materials can be wearables are possible which allowing printed circuitry to insert into compact spaces. Flexible materials are tending to cost more for fabrication but save on cost and weight. The flexible electronics have to be protected against environmental influences because of the increasing usage of flexible electronics recently [44]. One advantage of flexible materials is that they can be used in areas with environmental hazards. Flexible materials also can be waterproof, shockproof or corrosion-resistant. Soft circuit materials such as an epoxy or plastic form a coating around a filler, often a glass weave [108]. This form of glass or a ceramic filler that provides strength and rigidity to the plastic dielectric material.
- iii. **Flex-rigid PCBs:**
There are third option for PCB substrates: a combination of flexible and rigid materials. Often used in aerospace, medical and military applications, flex-rigid boards consist of multiple layers of flexible PCB, such as polyimide, attached to a rigid PCB layer [108]. Flexible polymer substrates usually can be found in the field of plastic electronic devices, namely microelectronic devices, including radio frequency identification tags or electrodes for thin-film transistor circuits is using inkjet printing for high-resolution conductive features [45].

2.1.2 Substrates for SCI Film

There are three types of substrate conductive films in SCI which are flexible, stretchable and soft [46]. The combination of conductivity and deformability of liquid metals is suitable for identified materials. The mechanical properties of the material cause the deformation limit of the shape of the conductor along the fluid to be limited. There are many advantages of thin-film materials over their counterparts, in terms of properties, applications, and economic considerations which have mechanical flexibility, for instance bendability, when they are in free form or integrated with other thin-film materials [47].

i. Flexible Substrates

Flexible substrates are circuits and electronic devices that can remain functioning while being bent. By using flexible substrates the weight of flat panel displays will significantly reduce and provide the ability to conform, bend or roll a display into any shape. Flexible substrates face problems under humidity and corrosive environment and also have high electrical insulating properties, flexibility, transparency, toughness, smoothness, and it must be highly stable and functional [48] It also will provide the basis for cost-effective mass production through open up the possibility of fabricating displays by continuous roll processing. Aluminum foil is flexible even though bulk aluminum is rigid and this concept has been used commercially to build flexible conductors and transistors on polymeric substrates such as polyimide or polyethylene naphthalene (PEN) [46].

ii. Stretchable Substrates

Stretchable substrates or electronics can be elongated which can be used in a wider application space while providing increased durability [49]. Stretchable substrates become an important unit for circuit connection of working circuits of various stretchable devices. In order to have a high quality stretchable printed circuit, it must able to have good adhesive strength and be exposed to high temperatures with the substrate, while maintaining electrical conductive performance [50]. Stretchable electronic design and fabrication common approach is by connecting hard component through stretchable interconnects [51]. With the help of multiple manufacturing strategies, various stretchable electronic devices are fabricated including stretchable heaters, stretchable energy conversion and storage devices, stretchable transistors, sensors and artificial skin [52]. For the close and precise monitoring of "stretched" body organs such as the lungs require stretchable electronics solution [53].

iii. Soft Substrates

Soft and elastic electrically conductive and semi-conductive composite materials can be developed based on nanomaterials/conjugated polymers and elastomers. Soft electronic is the same concept as stretchable electronics which has the advantage of changing geometric shapes based on the appropriate shape [46]. High-performance functional materials that can sustain large deformations can be achieved by tailoring the properties of the conductive filler and the morphology of the composite. The interaction between the nanostructured conductive filler and the elastomer matrix is of particular interest for understanding and developing new materials and devices. According to [54], wrinkles are more suitable under compression, and thin films coherently deform with a soft substrate for strong interfacial bonding. The ability of renewable electronic

substrates to adjust the skin's curvilinear surface reduces the need for users to pay attention to the device.

2.2 Stretchable Conductive Ink Sensors

The SCI offers a unique solution for embedding electronics in wearable applications including clothing, accessories, and medical devices. The ink can be used to create a thin stretchable form-fitting circuit that allows for both comfort and freedom in wearable devices. In real-life scenarios, one of the major challenges in wearable chemical sensors that can cause poor deformations of wearable devices, including power sources and sensors, is because of the multiplexed movement [55]. According to users in the sports industry, wrist-worn activity makes the impact of wearables electronics by helping users to measure their physical activities gaining popularity. The definition of stretchable directions and complex fabrication processes have a limitation to be concern which all these difficulties can be resolved by printing alternative strategy to produce stable and stretchable sensing applications [56]. Conductive inks can be printed on lighter substrates that are as diverse as polyester, polycarbonates, polyurethanes, and paper. The use of these lightweight substrates opens the door for greater creativity in product development and less complexity in production.

Given the prevalence and low cost of today's printed electronic devices, end users rarely consider the technology that makes these devices tick. Soft sensors typically consist of deformable controls material that is patterned, affixed, or packed in non-stretchable materials [57]. There are few people associate the diagnostic electrocardiogram (ECG) with printed electronics. The use of conductive inks has been the catalyst for replacing rigid, inconvenient electrodes with the more comfortable, inexpensive and disposable sensor pads that are in use today. According to [58], the conductive ink was used as a transducer converting pressure into an electric signal. Another rapidly emerging application of ink-driven printed electronics is the broad category of wearables. Devices that use stretchable and washable inks can be heat transferred onto a garment and used to measure electrical impulses triggered by muscle movement. Wearables are already appearing in athletic and medical sectors and are quickly finding their way into other industries. Another conductive ink-based application is Smart Packaging. The embedded polymer thick films (PTF) circuitry in product packaging has greatly enhanced inventory control processes for wholesalers and retailers. The label industry has made stretchable label as attractive to the industry marketing.

In clinical application, the important role in guiding timely patient care setting is Point-of-care (POC) diagnostics because they are inexpensive, rapid, simple to use, and instrument independent [59]. The POC diagnostics is used to monitor, prevent and control the patient's condition remotely were no equipment and trained personnel nearby. High stretchability and bendability are required to accommodate body movement which stretchable strain sensor has the potential application of the textile electrode to wearable human motion detection devices [60]. Figures 1 and 2 shows the overview of flexible substrates for POC and application in medical industry.

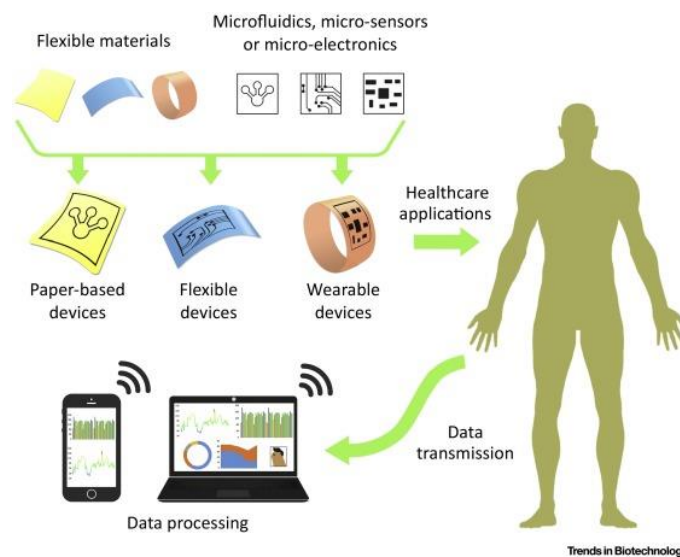


Figure 1. Overview of flexible substrate-based devices for Point-of-Care Diagnostics [59].

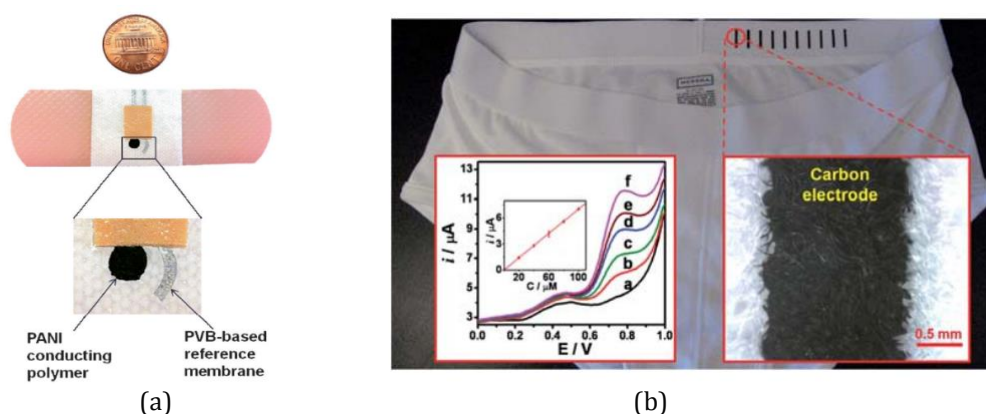


Figure 2. Application in medical industry.

(a) Printed potentiometric sensor on an adhesive bandage [61] and (b) a textile-based along with the morphology of a single electrode amperometric sensors [62].

3. DRIVING MONITORING SENSOR LAYOUT DESIGN

Transportation is a priority of today's society in communication. It plays an important role in the transport of individuals, the social welfare, the economy and the quality of life of a society [63]. The government has spent a lot of money on public transport, safety and other needs for the convenience of the people. Based on the method to overcome limited wired measurements used to monitor driver's health, the driver's health monitoring system is also a user-friendly system in a private area network environment [64]. Driving activity in some cases implies a risk for the driver and third parties. It is influenced by the environment, the road infrastructure, the mechanical-electrical status of the car, and the health and emotional state of the driver [65].

3.1 Driving Monitoring and Assistance Systems

The driver monitoring and assistance systems (DMAS) are very complex decision systems, using aggregate data to calculate a decision or recommendation of certain system where all decisions are used to detect the different actors and respectively to control the car properly [66]. Driving safety is based on the driver's attention when driving. Driver distraction, defined as distracting attention from activities that are critical to driving safely toward competitive activity, is

increasingly recognized as a significant source of injury and death on the road [67]. The driver is distracted while driving due to a number of things such as fatigue, drowsiness, unhealthy, drunkenness and so on. According to [68], secondary tasks may distract the driver while driving such as texting, interacting with passengers, talking on the phone, eating, and adjusting the radio among others. This makes the car manufacturing companies are looking for solutions to make driving safer by considering factors associated with the driver, vehicle, and driving environment.

The DMAS is one of the systems that has been used to help drivers avoid dangerous situations that are exposed to them. DMAS objectives is to keep an eye on the driving status of a driver and to provide necessary assistance for safe and comfortable driving [63]. The functionalities for such automation systems such as intelligent vehicle control systems, collision avoidance systems, advanced driver assistance systems, driver's inattention monitoring systems, and so on is consider as DMAS.

Figure 3 shows that the layout of a typical DMAS designed to continuously monitors the parameters associated with the driver, vehicle, and surroundings by acquiring data from multiple sensors and taken from the driver's body, interior, and exterior of the vehicle. Then required features extract the processed data based on which decision is made, and conveyed to the driver. DMAS can help provide alerts to the driver and initiate an intervention to manage the control of the vehicle. The driver monitoring and assistance system ensures that the driver is prepared to take control of the vehicle when the situation dictates.

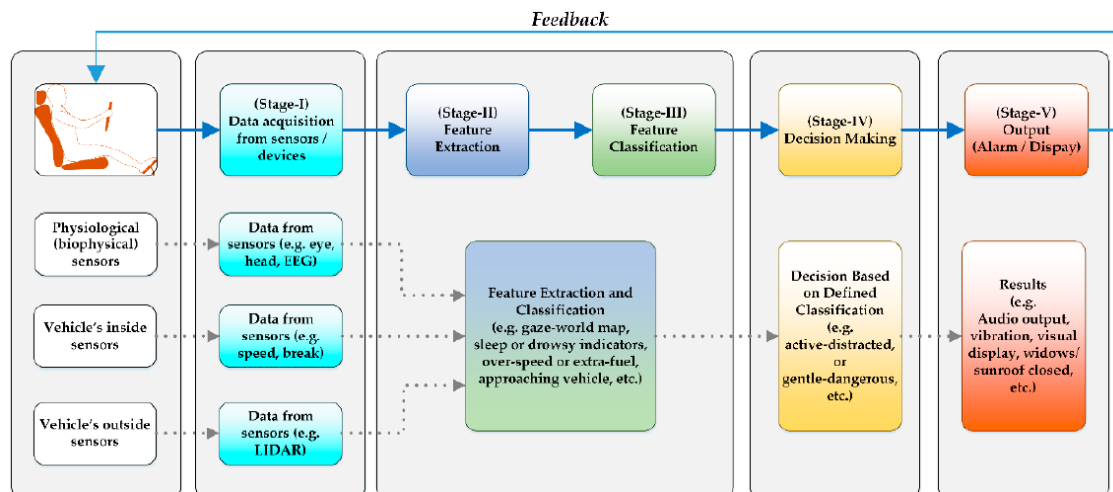


Figure 3. The The layout of the typical DMAS [63].

3.2 Health Monitoring Systems for The Monitoring of Bio-Signals

Nowadays the invention to provide a health monitoring system in vehicle is capable of correctly judging the condition of health of each person even when many people to be monitored exist [69]. Based on functionalized nano- and micro-materials, flexible and wearable sensors allow the detection of mechanical pressure and strain, temperature variations, and bio-potential changes in human body [70]. Health monitoring systems capability is continuously tracking physiological signals of the human body without conspicuous uncomfortableness and invasiveness [71]. The sensors give signals such as body motion, heart rate, breath, skin temperature and metabolism parameters, which are closely associated with personal health conditions. According to [72] human physiological activities monitored and recognized by the practical applications which exhibit from the sensors.

Figure 4 shows the wearable health monitoring system in ideal composition. Based on figure, the IoT is used as a tool to send the signal to the doctor (for monitoring or further action). Because of an increase in the number of elderly people, the combination of IoT platform and wearable system can efficiently meet the requirement for self-health monitoring and preventive medicine [71]. Smart facial expression recognition can be achieved by placing sensors on the underlying basic muscles on the skin will provide a universal facial expression. Stretchable and sensitive strain sensors attached to selected positions on facial skin, which contain the basic muscle groups for most expression movements [73]. Sensors will provide a signal every movement or change in the skin is directly continuously.

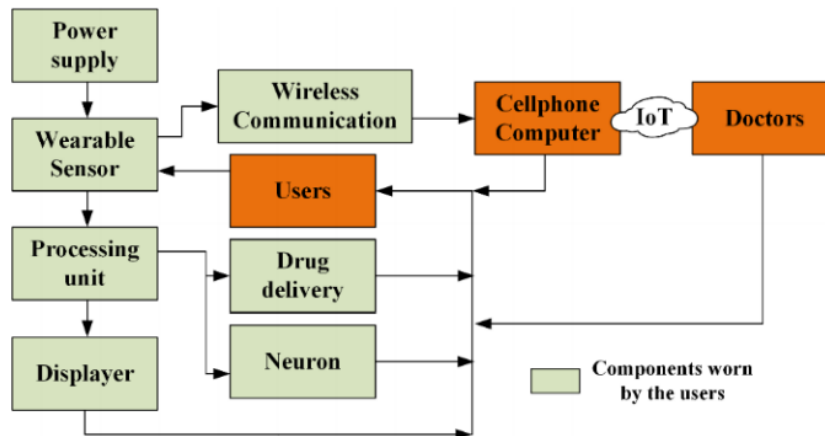


Figure 4. Wearable health monitoring system in ideal composition [71].

3.3 Vehicle Seat Sensors

All vehicles manufactured today have driver and passenger seats equipped with various sensors. Some of these sensors have their own use characteristics based on the needs or values that a vehicle should have. These safety features are paramount in the driver's seat because safety is from where people are.

3.3.1 Occupant Classification Systems

There are various names of passenger safety systems designed to detect the actual presence of a passenger in the seat, for example, Occupant Classification Systems (OCS), Seat Occupant Sensors (SOS), Occupant Detection Systems (ODS), Passenger Weight Systems (PWS). Every vehicle manufactured today has the safety systems and each of these systems performs very similar functions. Each Original Equipment Manufacturer (OEM) can have specific and potentially different procedures for repairing and recalibrating their system after an accident. The OEM required seat recalibration steps necessary to put these systems back in working order after an accident will always be addressed by Proper vehicle repair plans (VRPs).

The OCS is a system of sensors that detect who's sitting in the passenger seat by classifying an occupant type into an adult, a child, a child seat, or an object [74]. The need for an on/off switch for airbags in most cases is eliminated by OCS because it uses sophisticated computer technology to identify whether an adult or a child is in the seat. Generally, the occupant characterization method is to allow deployment for a child or small adult and to suppress deployment where it is reduced deployment force for a small child [75]. In addition, OCS are critical to front passenger's safety. OCS detect the presence of the passenger, a passenger's approximate weight, and the front passenger's seating position within the passenger compartment.

One of the popular OCS is made by Delphi. Inside the seat, will find an electronic control unit (ECU), a pressure sensor and a silicone-filled called as a bladder. When someone sits on the seat, the pressure sensor signals the occupant's weight to the ECU. The ECU then sends that data to the airbag, which has its own control unit. Based on that information, the vehicle's computer turns the passenger airbag standby mode. Therefore, the OCS data is used to determine if the airbag should be deployed, and the velocity at which it should be deployed as a result of a collision. Small children (in weight) occupant will have a fatal injuries caused by the airbag [76]. Different deployment velocities are used depending on the weight of the passenger. The OCS doesn't just detect weight but OCS also reads the passenger's seating position and determines if they're wearing a seat belt. It also has a seat belt tension sensor that allows the OCS to interpret the pressure created when a child seat is fitted. This shows that the system is designed to tell whether a child's safety seat is occupying that seat or whether just carrying some heavy object. It is also having a light or sign on the instrument panel tells the driver whether the passenger airbag is on or off.

3.4 Monitoring Human Activity from Driver Seat

Biophysical measurement can give many useful information for drivers by using sensing devices. A person driving a vehicle needs to be healthy and be able to concentrate on driving. A driver's body parameters like body temperature, heart rate, brain activity, muscle motion and other critical data affecting health conditions can be collected and monitored [77]. The human body temperature is kept within certain limits, declared normal, and not influenced by the temperature of the environment [78]. In recent years there are several methods that be used to monitoring the driver health. Some automakers have used systems that have been considered as a necessity for today's vehicle safety. Among the systems used today are such as Driving Monitoring System (DMS), DMAS, Advance Driving Assistance System (ADAS) and many more. Based on these systems, some inventors have further enhanced the capabilities of the driver monitoring system based on current customer demands or requirements.

There are several devices used to provide information of driver biological and physiological and so on detect driver's fatigue. Electroencephalogram (EEG) is extensively used in the field of brain activity research, Electrocardiogram (ECG) provide information of heart rate and respiration rate, Electrooculography (EOG) provides a measure of the cornea-retinal standing potential between the front and the back of the human eye, Electromyography (EMG) evaluating and recording the electrical signal generated from muscle contraction, Electro-Dermal Activity (EDA) provides a measure of skin conductance which changes due to the secretion of sweat gland because the parasympathetic nervous system activity is triggered and will reduce sweating during drowsiness, and etc. [63]. Most of the information related to the subject's physiological status is carried by the ECG [79]. People usually have little control over physiological signals which has become an effective way of assessing driver fatigue and make it a reliable source of driver information [80]. Conventional biophysical measurement systems require electrodes to interact with the human body which will interfere with the operation of the driver but is also not suitable for long-term surveillance purposes [81]. It is often that the emotion-related activity recognition been realized using a camera to analyze the facial expressions and gestures and also using electrocardiograms, brain waves and galvanic skin reactions from physiological signals [82]. The EOG blink duration and EEG different ratios between low-frequency range which indicates sleepiness and the high-frequency range to indicates alertness contributes the most to drowsiness classification results among physiological features [83].

3.4.1 Non-Contact ECG Monitoring for Automotive Application

There are several methods for measuring driver behaviour and health can be used in car seats, for example by using capacitive electrocardiogram (cECG), ballistocardiogram (BCG) using piezo-

foils for mechanical movement analysis, and inductive impedance monitoring [84]. Capacitive electrode is not used on the body but ECG can be recorded through clothing [85]. Most studies estimate driver behaviour based on image processing using vision-based techniques that need to include complex signal processing levels to limit parameters such as harsh environmental conditions, driver movements, and driving conditions [86]. According to [87], passenger heart function and stress level monitoring device is ECG because it is the most prominent vital signal. Driving stress changes the driver's mood, and major disruptions to driving sometimes occur for it [88]. By implementing the capacitive ECG monitoring (cECG) technique, the measurement mode can be done by not contact to the passenger or driver. Figure 5 shows the co-driver seat featuring the capacitive electrodes at the backrest.

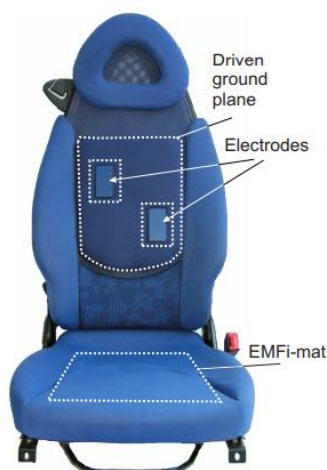


Figure 5. The co-driver seat featuring capacitive electrodes at the backrest and an additional acceleration sensor (EMFi-mat) in the seat [87].

3.4.2 Method and Apparatus for Monitoring Driver Alertness

Method and Alertness for Monitoring Driver Alertness is invented by [89]. The inventor has made a seat to monitoring driver's seated postured by using pressure sensor array disposed in or on the seat indicate pattern of pressure from the driver body distribute over the seat surface [89]. The invention objective is to determine if the driver may not be able to operate the vehicle safely by using a method and apparatus for monitoring driver alertness that utilized seat-mounted pressure sensor and also provide occupant status information to occupant restraint system controller.

Drivers are not currently well-informed of their drowsiness or sleepy, thus increasing the risk for them and others when they are driving while drowsy or asleep [90]. When the driver is not drowsy, their alertness when driving will be better than when they are drowsy because they will show the frequency of eye blinks is increased, braking response taking very long and increased lane deviation [91]. The invention will detect the driver head tipping or nodding forward, which detect the increased blink rate or eyes closing and detect the accuracy tracking vehicle within the lane while driving. the controller is able to distinguish between the patterns indicating a heavy occupant, calling for a relatively rapid and/or high-powered inflation of the airbag, a lighter occupant, calling for a slower and lower-powered inflation; and a child safety seat, calling for complete suppression of bag deployment [89].

3.4.3 Driver Health and Fatigue Monitoring System and Method

Drowsy and distracted driving is a common abnormal driving behavior and both driving behavior for different driver is variant [92]. [93] is another inventor that has invented a driver health and

fatigue monitoring system and method. This invention is to monitoring a driver of a vehicle characteristic, condition, property and or state of the driver [93]. The invention is to give signals or notification to the driver's condition of their health or inattention that requires driver response to continue the operation of the vehicle.

Fatigued driving can be meant by the driver's ability to control the vehicle become weak after long-lasting drive which makes the disorder of mental and physical function [94]. Rash driving is also a major moving traffic violation which defined as a mental state in which a driver is shown to be unwilling to disregard the road rules [95]. The current driving scenario is needed to help reduce the impact of impaired driving because not all driving scenarios are the same and, therefore, a combination of specific warnings and/or automated driving measures need to be developed [96]. The advantages of the invention driver health and fatigue monitoring system and method is a combination of methods can be applied through the systems. the combination is using the heartbeat and respiration rates for determining drowsiness. For example, the eyelid motion observation and a behavioral diagnostic based on the observation for the vehicle lateral control behavior can be combined to improve the forecasting accuracy and reduce false alarm [93]. Variations in the eye will change according to the eye blink if the eyes are closed means high output otherwise the output is low [97].

According to [98] there are four categories using visual features techniques: eye state analysis, eye blinking analysis, mouth, and yawning analysis and facial expression analysis. From the information of the driver gaze direction, the driver also can be detected whether is distracted or vice versa [99]. The heartbeat and/or respiration of the driver and/or occupant of the vehicle can be analyzed to determine the state of drowsiness or health state by new uses analyzer and new uses of weight sensor e.g. bladders, strain gages, load sensors or displacement sensors, radar based-sensors or accelerometer [93]. According to [100], the use of various sensors can be uncomfortable for the driver and may impede the movement of the driver but there is a strong need for low-cost drowsiness sensors and can be used for early identification of drivers at risk of drowsiness.

4. CONCLUSION

Technological advances in driving safety have increased dramatically in recent times. This has resulted in most automobile industry competing to keep their vehicles safe and thus reducing road accidents resulting in losses to many, especially road users. To make driving safer, the driver monitoring system has been improved in many ways such as driver health, driver fatigue, drowsiness, drunkenness, and driver negligence. Safety while driving is important to prevent accidents. Various reforms or improvements in terms of safety features that have been made by vehicle manufacturers especially driver monitoring systems. The safety features of the driver's monitoring system are to monitor the driver's health. Driver's health plays a very important role if the driver is fatigued or drowsiness while driving. Various inventions have been carried out over the years to monitor driver's health. Each of these inventions has its own advantages depending on local needs and circumstances. This is because the cost of manufacturing is high and the automobile companies have to comply with the rules and regulations of a country.

The SCI sensors layout design can be used to prevent road accidents as a result of driver behavior and will make driving monitoring system more effective with soft substrates technology that has the advantage of geometric deformation based on appropriate shapes. It also can reduce the cost of fabrication because of less complexity in production and increase creativity in product development. The breath movement of the human body will be affecting the seat sensor signals [101]. Even the SCI can interface with the human body and is compatible with human supple and sensitive nerves, one of the improvements in the advanced stretchable conductive ink technology

is that it can also be used to mimic the function of human skin even if it is further enhanced by converting human skin stimulation such as temperature, pressure, tension, humidity and many more to electrical signals [102]. This will be able to determine the efficiency of the SCI through the sensors used to detect fatigue or drowning drivers. The results from that efficiency will be optimized to get the best model for SCI sensors layout design for driver seat.

The main challenge in the driver monitoring system is to integrate many of the driver's health level tracking features at one time. This is because, in the driver's health monitoring system, most of the previous studies and inventions can only be detected by one sensor at a time. Sometimes the signal given by the sensor is in error in terms of the data received. The data received has errors in terms of body size of driver (child or adult), driver's posture (seating position), driver's use of sunglasses (eye-related sensors), driver's age, driver's disability and etc. This shows the importance of a driver's monitoring system to detect more than one driver's health status at a time to determine the driver's actual condition.

Driver Health and Fatigue Monitoring System and Method is a system that can combine more than one method to detect the drowsiness and fatigue of the driver at one time. The system invented by [93], can improve forecasting accuracy and reduce false alarm or signal to monitoring and determining the health of the driver. The combination of the system also can be used by combining the heartbeat sensor, respiration sensor and motion sensor with other occupant sensor systems. For example, the driver seat and weight sensors based on strain gages or bladders only be used for the health and fatigue monitoring system, and to classify the passenger and driver, the system can be used by optical sensors, ultrasonic sensors, seat track, and seatback sensors, etc. [93].

ACKNOWLEDGEMENTS

Special thanks to Fakulti Kejuruteraan Mekanikal, Universiti Teknikal Malaysia Melaka (UTeM) for providing the laboratory facilities

REFERENCES

- [1] A. Reyes-Muñoz, M. C. Domingo, M. A. López-Trinidad, and J. L. Delgado. Integration of body sensor networks and vehicular Ad-hoc networks for traffic safety. *Sensors*, issue **16**, no. 1 (2016) pp. 1–29.
- [2] D. Raimundo, A. Lourenco, and A. Abrantes. Driving simulator for performance monitoring with physiological sensors. *IEEE Mediterr. Eletechnical Conf. MELECON (2018)* pp. 119–124.
- [3] S. J. Jung, H. S. Shin, and W. Y. Chung. Highly sensitive driver health condition monitoring system using nonintrusive active electrodes. *Sensors Actuators, B Chem.*, issue **171–172** (2012) pp. 691–698.
- [4] A. J. Bandodkar, R. Nuñez-Flores, W. Jia, and J. Wang. All-printed stretchable electrochemical devices. *Adv. Mater.*, issue **27**, no. 19 (2015) pp. 3060–3065.
- [5] Y. Li, Y. Zheng, J. Wang, K. Kodaka, and K. Li, “Crash probability estimation via quantifying driver hazard perception,” *Accid. Anal. Prev.*, vol. 116, no. November 2016, pp. 116–125, 2018.
- [6] T. Brown, J. Lee, C. Schwarz, D. Fiorentino, and A. McDonald. Assessing the feasibility of vehicle-based sensors to detect drowsy driving,” *Feasibility Veh. Sensors to Detect Drowsy Driv. Alcohol Impair.* (with accompanying CD-ROM), no. February, pp. 1–56, 2014.
- [7] D. Sowmya, I. Suneetha, and N. Pushpalatha, “Driver Behavior Monitoring through Sensors and Tracking the Accident using Wireless Technology,” *Int. J. Comput. Appl.*, vol. 102, no. 2, pp. 21–27, 2014.

- [8] X. Meng et al., "Triboelectric nanogenerator as a highly sensitive self-powered sensor for driver behavior monitoring," *Nano Energy*, vol. 51, pp. 721–727, 2018.
- [9] J. Kuo et al., "Continuous monitoring of visual distraction and drowsiness in shift-workers during naturalistic driving," *Saf. Sci.*, no. February, pp. 0–1, 2018.
- [10] J. L. Paul Bao-Luo Chou, Bhavani S. Iyer, "System and method for vehicle diagnostics and health monitoring," vol. 1, no. 12, 1999.
- [11] J. J. Rolison, S. Regev, S. Moutari, and A. Feeney, "What are the factors that contribute to road accidents? An assessment of law enforcement views, ordinary drivers' opinions, and road accident records," *Accid. Anal. Prev.*, vol. 115, no. February, pp. 11–24, 2018.
- [12] L. Masanovic, M. Vranjes, R. Dzakula, and Z. Lukac, "Driver monitoring using the in-vehicle camera," 2019 Zooming Innov. Consum. Technol. Conf., pp. 33–38, 2019.
- [13] B. Mandal, L. Li, G. S. Wang, and J. Lin, "Towards Detection of Bus Driver Fatigue Based on Robust Visual Analysis of Eye State," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 3, pp. 545–557, 2017.
- [14] J. Gonçalves and K. Bengler, "Driver State Monitoring Systems– Transferable Knowledge Manual Driving to HAD," *Procedia Manuf.*, vol. 3, no. Ahfe, pp. 3011–3016, 2015.
- [15] V. Leonhardt et al., "Informationsfusion für die kooperative Umfeldwahrnehmung vernetzter Fahrzeuge," *Inf. Fusion*, vol. 2015 Inter, no. 1, pp. 450–455, 2016.
- [16] T. Loher, S. Karaszkievicz, L. Bottcher, and A. Ostmann, "Compact power electronic modules realized by PCB embedding technology," 2016 IEEE CPMT Symp. Japan, ICSJ 2016, pp. 259–262, 2016.
- [17] S. P. Gao et al., "Common-mode filter using cavity-backed defected ground structure for multilayer PCB," 2016 Asia-Pacific Int. Symp. Electromagn. Compat. APEMC 2016, pp. 916–918, 2016.
- [18] A. Canal Marques, J. M. Cabrera, and C. De Fraga Malfatti, "Printed circuit boards: A review on the perspective of sustainability," *J. Environ. Manage.*, vol. 131, pp. 298–306, 2013.
- [19] P. Hadi, C. Ning, W. Ouyang, C. S. K. Lin, C. W. Hui, and G. McKay, "Conversion of an aluminosilicate-based waste material to high-value efficient adsorbent," *Chem. Eng. J.*, vol. 256, pp. 415–420, 2014.
- [20] C. Ning, C. S. K. Lin, D. C. W. Hui, and G. McKay, "Waste Printed Circuit Board (PCB) Recycling Techniques," *Top. Curr. Chem.*, vol. 375, no. 2, 2017.
- [21] N. Matsuhisa et al., "Printable elastic conductors with a high conductivity for electronic textile applications," *Nat. Commun.*, vol. 6, no. May, pp. 1–11, 2015.
- [22] Q. Huang and Y. Zhu, "Printing Conductive Nanomaterials for Flexible and Stretchable Electronics: A Review of Materials, Processes, and Applications," *Adv. Mater. Technol.*, vol. 4, no. 5, pp. 1–41, 2019.
- [23] J. Suikkola et al., "Screen-Printing Fabrication and Characterization of Stretchable Electronics," *Sci. Rep.*, vol. 6, no. May, pp. 1–8, 2016.
- [24] E. Tan, Q. Jing, M. Smith, S. Kar-Narayan, and L. Occhipinti, "Needs and Enabling Technologies for Stretchable Electronics Commercialization," *MRS Adv.*, vol. 2, no. 31–32, pp. 1721–1729, 2017.
- [25] J. Liang, K. Tong, and Q. Pei, "A Water-Based Silver-Nanowire Screen-Print Ink for the Fabrication of Stretchable Conductors and Wearable Thin-Film Transistors," *Adv. Mater.*, pp. 5986–5996, 2016.
- [26] T. Sekitani et al., "Stretchable active-matrix organic light-emitting diode display using printable elastic conductors," *Nat. Mater.*, vol. 8, no. 6, pp. 494–499, 2009.
- [27] S. J. Benight, C. Wang, J. B. H. Tok, and Z. Bao, "Stretchable and self-healing polymers and devices for electronic skin," *Prog. Polym. Sci.*, vol. 38, no. 12, pp. 1961–1977, 2013.
- [28] L. Huang, Y. Huang, J. Liang, X. Wan, and Y. Chen, "Graphene-based conducting inks for direct inkjet printing of flexible conductive patterns and their applications in electric circuits and chemical sensors," *Nano Res.*, vol. 4, no. 7, pp. 675–684, 2011.
- [29] J. A. Rogers, T. Someya, and Y. Huang, "Materials and mechanics for stretchable electronics," *Science (80-.)*, vol. 327, no. 5973, pp. 1603–1607, 2010.

- [30] G. Cummins and M. P. Y. Desmulliez, "Inkjet printing of conductive materials: A review," *Circuit World*, vol. 38, no. 4, pp. 193–213, 2012.
- [31] K. Xia, H. Zhang, Z. Zhu, and Z. Xu, "Folding triboelectric nanogenerator on paper based on conductive ink and teflon tape," *Sensors Actuators, A Phys.*, vol. 272, no. 2010, pp. 28–32, 2018.
- [32] C. Hunrath and L. Forest, "Circuit Technology Crossovers Where PCBs and Printed Electronics Meet," no. IPC APEX EXPO Conference Proceedings, p. 6, 2009.
- [33] S. Merilampi, T. Björninen, V. Haukka, P. Ruuskanen, L. Ukkonen, and L. Sydänheimo, "Analysis of electrically conductive silver ink on stretchable substrates under tensile load," *Microelectron. Reliab.*, vol. 50, no. 12, pp. 2001–2011, 2010.
- [34] V. Kedambaimoole, N. Neella, V. Gaddam, K. Rajanna, and M. M. Nayak, "Graphene-Nickel composite films on flexible PCB for temperature monitoring," 2017 IEEE 12th Int. Conf. Nano/Micro Eng. Mol. Syst. NEMS 2017, pp. 173–176, 2017.
- [35] K. Pan et al., "Sustainable production of highly conductive multilayer graphene ink for wireless connectivity and IoT applications," *Nat. Commun.*, vol. 9, no. 1, 2018.
- [36] A. Kamyshny and S. Magdassi, "Conductive nanomaterials for printed electronics," *Small*, vol. 10, no. 17, pp. 3515–3535, 2014.
- [37] S. Chun, Y. Choi, and W. Park, "All-graphene strain sensor on soft substrate," *Carbon N. Y.*, vol. 116, pp. 753–759, 2017.
- [38] H. Li, K. S. Moon, and C. P. Wong, "A novel approach to stabilize contact resistance of electrically conductive adhesives on lead-free alloy surfaces," *J. Electron. Mater.*, vol. 33, no. 2, pp. 106–113, 2004.
- [39] Y. Li and C. P. Wong, "Recent advances of conductive adhesives as a lead-free alternative in electronic packaging: Materials, processing, reliability and applications," *Mater. Sci. Eng. R Reports*, vol. 51, no. 1–3, pp. 1–35, 2006.
- [40] Y. Li and C. P. Wong, "High performance anisotropic conductive adhesives for lead-free interconnects," 2005 Conf. High Density Microsyst. Des. Packag. Compon. Fail. Anal. HDP'05, 2006.
- [41] S. M. Lebedev, O. S. Gefle, S. N. Dneprovskii, and E. T. Amitov, "Electrophysical properties of thermally conductive polymer materials," *Russ. Phys. J.*, vol. 57, no. 10, pp. 1423–1427, 2015.
- [42] S. Zhang, E. Laboure, D. Labrousse, and S. Lefebvre, "Thermal management for GaN power devices mounted on PCB substrates," 2017 IEEE Int. Work. Integr. Power Packag. IWIPP 2017, vol. 285, pp. 1–5, 2017.
- [43] P. Hadi, M. Xu, C. S. K. Lin, C. W. Hui, and G. McKay, "Waste printed circuit board recycling techniques and product utilization," *J. Hazard. Mater.*, vol. 283, pp. 234–243, 2015.
- [44] M. Fridrichovsky, F. Steiner, and M. Hirman, "Comparison of the characteristics of PCB protective coatings," *Proc. Int. Spring Semin. Electron. Technol.*, pp. 1–6, 2017.
- [45] J. Perelaer and U. S., "Inkjet Printing and Alternative Sintering of Narrow Conductive Tracks on Flexible Substrates for Plastic Electronic Applications," *Radio Freq. Identif. Fundam. Appl. Des. Methods Solut.*, no. February, 2010.
- [46] M. D. Dickey, "Emerging applications of liquid metals featuring surface oxides," *ACS Appl. Mater. Interfaces*, vol. 6, no. 21, pp. 18369–18379, 2014.
- [47] Y. Wang, Z. Li, and J. Xiao, "Stretchable Thin Film Materials: Fabrication, Application, and Mechanics," *J. Electron. Packag. Trans. ASME*, vol. 138, no. 2, pp. 1–22, 2016.
- [48] J. ur Rehman and M. H. Chowdhury, "Conventional versus Flexible Substrates for Dye Sensitized and Perovskite Type Photo Voltaic Solar Cells," pp. 1–3, 2019.
- [49] J. M. Nassar, J. P. Rojas, A. M. Hussain, and M. M. Hussain, "From stretchable to reconfigurable inorganic electronics," *Extrem. Mech. Lett.*, vol. 9, pp. 245–268, 2016.
- [50] N. S. Rozali et al., "Effect type of conductive inks to stretchable printed circuit under thermal performance," no. May, pp. 279–280, 2018.
- [51] A. Mamidanna, Z. Song, C. Lv, C. S. Lefky, H. Jiang, and O. J. Hildreth, "Printing Stretchable

- Spiral Interconnects Using Reactive Ink Chemistries,” *ACS Appl. Mater. Interfaces*, vol. 8, no. 20, pp. 12594–12598, 2016.
- [52] W. Wu, “Stretchable electronics: functional materials, fabrication strategies and applications,” *Sci. Technol. Adv. Mater.*, vol. 20, no. 1, pp. 187–224, 2019.
- [53] A. Mohammed and M. Pecht, “A stretchable and screen-printable conductive ink for stretchable electronics,” *Appl. Phys. Lett.*, vol. 109, no. 18, 2016.
- [54] Q. Zhang and J. Yin, “Spontaneous buckling-driven periodic delamination of thin films on soft substrates under large compression,” *J. Mech. Phys. Solids*, vol. 118, pp. 40–57, 2018.
- [55] I. Jeerapan, J. R. Sempionatto, A. Pavinatto, J. M. You, and J. Wang, “Stretchable biofuel cells as wearable textile-based self-powered sensors,” *J. Mater. Chem. A*, vol. 4, no. 47, pp. 18342–18353, 2016.
- [56] H. Lee, J. Lee, B. Seong, H. S. Jang, and D. Byun, “Printing Conductive Micro-Web Structures via Capillary Transport of Elastomeric Ink for Highly Stretchable Strain Sensors,” *Adv. Mater. Technol.*, vol. 3, no. 2, pp. 1–7, 2018.
- [57] J. T. Muth et al., “Embedded 3D printing of strain sensors within highly stretchable elastomers,” *Adv. Mater.*, vol. 26, no. 36, pp. 6307–6312, 2014.
- [58] J. Volf, V. Novák, and V. Ryzhenko, “Effect of conductive ink properties of tactile sensors,” *Procedia Eng.*, vol. 120, pp. 200–205, 2015.
- [59] S. Q. Wang, T. Chinnasamy, M. A. Lifson, F. Inci, and U. Demirci, “Flexible Substrate-Based Devices for Point-of-Care Diagnostics,” *Trends Biotechnol.*, vol. 34, no. 11, pp. 909–921, 2016.
- [60] W. J. Lee, J. Y. Park, H. J. Nam, and S. H. Choa, “The development of a highly stretchable, durable, and printable textile electrode,” *Text. Res. J.*, 2019.
- [61] T. Guinovart, G. Valdés-Ramírez, J. R. Windmiller, F. J. Andrade, and J. Wang, “Bandage-Based Wearable Potentiometric Sensor for Monitoring Wound pH,” *Electroanalysis*, vol. 26, no. 6, pp. 1345–1353, 2014.
- [62] Y. L. Yang, M. C. Chuang, S. L. Lou, and J. Wang, “Thick-film textile-based amperometric sensors and biosensors,” *Analyst*, vol. 135, no. 6, pp. 1230–1234, 2010.
- [63] M. Q. Khan and S. Lee, “A comprehensive survey of driving monitoring and assistance systems,” *Sensors (Switzerland)*, vol. 19, no. 11, 2019.
- [64] H. S. Shin, S. J. Jung, J. J. Kim, and W. Y. Chung, “Real time car driver’s condition monitoring system,” *Proc. IEEE Sensors*, pp. 951–954, 2010.
- [65] J. Izquierdo-Reyes, R. A. Ramirez-Mendoza, M. R. Bustamante-Bello, S. Navarro-Tuch, and R. Avila-Vazquez, “Advanced driver monitoring for assistance system (ADMAS): Based on emotions,” *Int. J. Interact. Des. Manuf.*, vol. 12, no. 1, pp. 187–197, 2018.
- [66] F. Bock, S. Siegl, P. Bazan, P. Buchholz, and R. German, “Reliability and test effort analysis of multi-sensor driver assistance systems,” *J. Syst. Archit.*, vol. 85–86, no. January, pp. 1–13, 2018.
- [67] J. L. C. and R. C. Alberto Fernández, Rubén Usamentiaga, “and Algorithms,” pp. 1–44, 2016.
- [68] M. Ye, O. A. Osman, S. Ishak, and B. Hashemi, “Detection of driver engagement in secondary tasks from observed naturalistic driving behavior,” *Accid. Anal. Prev.*, vol. 106, no. January, pp. 385–391, 2017.
- [69] T. (JP); M. Mitsuo Yasushi and T. (JP) Yanagidaira, “HEALTH MONITORING SYSTEM,” vol. 2, no. 12, 2002.
- [70] M. Ha, S. Lim, and H. Ko, “Wearable and flexible sensors for user-interactive health-monitoring devices,” *J. Mater. Chem. B*, vol. 6, no. 24, pp. 4043–4064, 2018.
- [71] Y. Liu, H. Wang, W. Zhao, M. Zhang, H. Qin, and Y. Xie, “Flexible, stretchable sensors for wearable health monitoring: Sensing mechanisms, materials, fabrication strategies and features,” *Sensors (Switzerland)*, vol. 18, no. 2, 2018.
- [72] Y. Pang et al., “Flexible, Highly Sensitive, and Wearable Pressure and Strain Sensors with Graphene Porous Network Structure,” *ACS Appl. Mater. Interfaces*, vol. 8, no. 40, pp. 26458–26462, 2016.
- [73] M. Su et al., “Nanoparticle Based Curve Arrays for Multirecognition Flexible Electronics,”

- Adv. Mater., vol. 28, no. 7, pp. 1369–1374, 2016.
- [74] S. B. Goktuk and A. Rafii, “An Occupant Classification System Eigen Shapes or Knowledge-Based Features,” pp. 57–57, 2006.
- [75] C. A. Gray, “Vehicle seat occupant characterization method including ultralight child seat detection. United States Patent,” vol. 2, no. 12, 2002.
- [76] M. E. Farmer and A. K. Jain, “Occupant classification system for automotive airbag suppression,” Proc. IEEE Comput. Soc. Conf. Comput. Vis. Pattern Recognit., vol. 1, 2003.
- [77] S. Patil, “In-Vehicle Driver Health Monitoring System,” vol. 9, no. 2, pp. 38–40, 2016.
- [78] A. I. Dumitru and G. L. Mogan, “Aspects concerning drives monitoring healthcare systems,” Bull. Transilv. Univ. Brasov, vol. 7, no. 56, pp. 7–12, 2014.
- [79] Y. Ma, F. Tian, Q. Zhao, and B. Hu, “Design and Application of Mental Fatigue Detection System Using Non-Contact ECG and BCG Measurement,” Proc. - 2018 IEEE Int. Conf. Bioinforma. Biomed. BIBM 2018, pp. 1508–1513, 2019.
- [80] L. Wang, H. Wang, and X. Jiang, “A new method to detect driver fatigue based on emg and ecg collected by portable non-contact sensors,” Promet - Traffic - Traffico, vol. 29, no. 5, pp. 479–488, 2017.
- [81] Y. Sun and X. Yu, “An innovative nonintrusive driver assistance system for vital signal monitoring,” IEEE J. Biomed. Heal. Informatics, vol. 18, no. 6, pp. 1932–1939, 2014.
- [82] R. Gravina and Q. Li, “Emotion-relevant activity recognition based on smart cushion using multi-sensor fusion,” Inf. Fusion, vol. 48, pp. 1–10, 2019.
- [83] S. Barua, M. U. Ahmed, C. Ahlström, and S. Begum, “Automatic driver sleepiness detection using EEG, EOG and contextual information,” Expert Syst. Appl., vol. 115, pp. 121–135, 2019.
- [84] M. Walter, B. Eilebrecht, T. Wartzek, and S. Leonhardt, “The smart car seat: Personalized monitoring of vital signs in automotive applications,” Pers. Ubiquitous Comput., vol. 15, no. 7, pp. 707–715, 2011.
- [85] M. Weder et al., “Embroidered electrode with silver/titanium coating for long-term ECG monitoring,” Sensors (Switzerland), vol. 15, no. 1, pp. 1750–1759, 2015.
- [86] R. K. Singh, A. Sarkar, R. K. Thakur, and C. S. Anoop, “A real-time heart-rate monitor using non-contact electrocardiogram for automotive drivers,” 2016 IEEE 1st Int. Conf. Control. Meas. Instrumentation, C. 2016, vol. 6, no. Cmi, pp. 484–488, 2016.
- [87] S. Leonhardt and A. Aleksandrowicz, “Non-contact ECG monitoring for automotive application,” Proc. 5th Int. Work. Wearable Implant. Body Sens. Networks, BSN2008, conjunction with 5th Int. Summer Sch. Symp. Med. Devices Biosensors, ISSS-MDBS 2008, pp. 183–185, 2008.
- [88] R. J. Rony and N. Ahmed, “Monitoring Driving Stress using HRV,” 2019 11th Int. Conf. Commun. Syst. Networks, COMSNETS 2019, vol. 2061, pp. 417–419, 2019.
- [89] R. A. Najor, “Method and apparatus for monitoring driver alertness,” vol. 1, no. 12, 2000.
- [90] B. T. Hiles, “Systems and methods for the mitigation of drowsy or sleepy driving,” vol. 2, no. 12, 2019.
- [91] J. He, W. Choi, Y. Yang, J. Lu, X. Wu, and K. Peng, “Detection of driver drowsiness using wearable devices: A feasibility study of the proximity sensor,” Appl. Ergon., vol. 65, pp. 473–480, 2017.
- [92] C.-Y. C. C.-R. H. M.-F. Chang, “Abnormal Driving Behavior Detection Using Sparse Representation,” pp. 390–395, 2016.
- [93] D. S. Breed, “Driver Health and Fatigue Monitoring System and Method United States Patent Date of Patent :,” Driv. Heal. Fatigue Monit. Syst. Method, vol. 1, no. 12, p. 33, 2014.
- [94] Z. Li, L. Chen, J. Peng, and Y. Wu, “Automatic detection of driver fatigue using driving operation information for transportation safety,” Sensors (Switzerland), vol. 17, no. 6, 2017.
- [95] S. B. Shinde, S. Sinha, S. Kumar, and S. Seema, “Rash Driving Detection System,” no. 3, pp. 118–121, 2016.
- [96] C. T. Zagorski, “Method and system for mitigating the effects of an impaired driver,” vol. 2, no. 12, 2019.

- [97] D. Susitra, B. L. Prasanna, and A. Manisha, “Sensor Based Health Monitoring System for Driver Using Wireless Communication,” no. 2, pp. 6–11, 2017.
- [98] S. Kaplan, M. A. Guvensan, A. G. Yavuz, and Y. Karalurt, “Driver Behavior Analysis for Safe Driving: A Survey,” *IEEE Trans. Intell. Transp. Syst.*, vol. 16, no. 6, pp. 3017–3032, 2015.
- [99] F. Vicente, Z. Huang, X. Xiong, F. De La Torre, W. Zhang, and D. Levi, “Driver Gaze Tracking and Eyes off the Road Detection System,” *IEEE Trans. Intell. Transp. Syst.*, vol. 16, no. 4, pp. 2014–2027, 2015.
- [100] G. Li, B. L. Lee, and W. Y. Chung, “Smartwatch-Based Wearable EEG System for Driver Drowsiness Detection,” *IEEE Sens. J.*, vol. 15, no. 12, pp. 7169–7180, 2015.
- [101] N. Mizuno and N. M. Hiep, An adaptive filtering technique for driver’s heart rate monitoring through vibration signal by seat-embedded piezoelectric sensors, vol. 11, no. PART. IFAC, 2013.
- [102] J. Tolvanen, J. Hannu, and H. Jantunen, “Stretchable and Washable Strain Sensor Based on Cracking Structure for Human Motion Monitoring,” *Sci. Rep.*, vol. 8, no. 1, pp. 1–10, 2018.