

## Performance Enhancement of a Photovoltaic Cell Working in Hot Environment Conditions using Al<sub>2</sub>O<sub>3</sub> Nanofluids: A CFD Study

Tammam Salim Naji Aswad<sup>1</sup>, Maher A. R. Sadiq Al-Baghdadi<sup>2</sup>, Muhannad Al-Waily<sup>2\*</sup>, Mohd Azahari Bin Razali<sup>1</sup>

<sup>1</sup>Faculty of Mechanical and Manufacturing Engineering, Universiti Tun Hussein Onn Malaysia, Malaysia

<sup>2</sup>Department of Mechanical Engineering, Faculty of Engineering, University of Kufa, Iraq

Received 8 March 2021, Revised 13 June 2021, Accepted 16 June 2021

### ABSTRACT

*The performance of photovoltaic cells is affected by the cell's temperature resulting from the ambient temperature. The solar cell's efficiency decreases significantly in hot regions due to its high temperature. In this work, the effect of cell temperature on the performance and efficiency of a photovoltaic cell consist of three layers has studied using a three-dimensional CFD model. A serpentine circular pipe has been fixed behind the aluminium plate and used as a heat exchanger to transfer the heat from the photovoltaic cell to the pipe fluid and reduces the photovoltaic cell temperature. Alumina nanoparticles (Al<sub>2</sub>O<sub>3</sub>) has been chosen due to the good chemical stability in the base fluid (water), relatively low cost compared to other nanoparticles, and most importantly, a lot of literature concluded that using Al<sub>2</sub>O<sub>3</sub> nanofluid can improve the heat transfer in heat exchangers. Nanoparticles of Al<sub>2</sub>O<sub>3</sub> were added to water at a rate of 4% to improve the thermal performance and efficiency of the heat exchange. The results showed an improvement of approximately 10% in the photovoltaic electrical efficiency when using the water cooling method and about 12% when using the nanofluid. The importance of the results in this study illustrates the possibility of increasing the performance and efficiency of the photovoltaic cell by cooling it in hot environment conditions with water alone and also with nanofluids by using a small percentage of nanoparticles.*

**Keywords:** Photovoltaic Cell, Nanofluids, CFD, Hot Environment.

### 1. INTRODUCTION

The solar cells are used to receive solar energy and convert the solar energy into electrical energy. There are millions of solar cells in a piece of a solar panel. Each cell consists of P and N semiconductor layers. These P and N layers are susceptible to light. When these P and N semiconductor layers receive the light energy, the electrons in the layers jump into the conduction layer. The external resistance connected across the P and N layers will cause the current conducts. The P and N layers holding the electrons also will form a potential difference across the terminal of the cell. According to the research (Chong & Lau, 2017) [1], each cell can contribute to the average voltage of 3.7 mV to 48 mV. A combination of solar cells in series connection is required to increase its voltage level. The cells can be placed in a block with  $m \times n$  matrix, where  $m$  and  $n$  are the row and column. The blocks are then combined to get high voltage and high current output. When the solar cells exposed to solar or under receiving solar energy, the heat may introduce on the surface of the solar cells. The heat occurs because of the heating effect by the sun and when the solar cells are in operation (connected to the electrical loads). The heat introduced by solar energy will create thermal noise, and this noise typically proportional to the temperature. The heat produced in the solar cells can be removed by a cooler. The design of a cooler is varieties. There are numerous ideas proposed in the past to reduce the temperature

and removed the heat in the solar cells. The primary purpose of removing the heat is to improve the stable operation of the solar cells and hence improve efficiency. In the past, there were many ideas proposed using a heat sink, fan as a cooler device and the structure that can help to remove the heat under the solar cells.

---

E-mail: muhanedl.alwaeli@uokufa.edu.iq

All these devices perform great in terms of efficiency, but they tend to make the system bulky, complicated and increase the cost. There are numerous cooling system for solar PV system being proposed by many engineers and designers around the world. Each of the proposed cooling systems is unique and using a different mechanism. In reviews, some of them using water to spray (Chong & Lau, 2017) [1], using aluminium fins (Lok & Kong, 2018) [2], using the electric fan for cooling (A, Norazlina, & Salina, 2016) [3], using heat absorber method (Rose & Donita, 2016) [4]. All the methods suggested have advantages and disadvantages. Some of them could be expensive in cost, bulky and occupy many spaces, and some of them are portable and detachable. The heat reduction or cooling system by means of using a radiator is no more recent in the invention. However, to the solar PV system, this could be a new idea. People did not think of using a radiator method for cooling photovoltaic cell mainly because it is very bulky and inconvenient. However, in return, this method tends to give a better cooling system when significant wattage of the photovoltaic cell is employed in the power plant. The radiator comprises of mechanical structure that is designed to remove the heat from the solar panel, especially when the radiator is placed in touch with the bottom of the solar panel. The heat usually absorbed by the solar cells at the surface, but the heat will pass through the solar cells and comes to the bottom part of the panel. The heat is then accumulating if it is not removed. The more heat accumulates, and then this will give rise to the temperature increase and hence introduces the thermal noise in the solar output.


In this study, three-dimensional modelling of a photovoltaic cell consists of three layers was performed. The serpentine circular pipe has been fixed behind the aluminium plate and used as a heat exchanger to transfer the heat from the photovoltaic cell to the pipe fluid and reduces the photovoltaic cell temperature. A lot of literature concluded that using nanofluid can improve the heat transfer in heat exchangers [5, 6]. Therefore, nanofluid was used in this research as a cooling fluid in a system of tubes for a solar cell that acts as a heat exchanger to study the resulting improvement in reducing its temperature and increasing its efficiency. An Alumina nanoparticle ( $Al_2O_3$ ) has been chosen due to the good chemical stability in the base fluid (water), relatively low cost compared to other nanoparticles, and widespread and familiarity in the industry. Nanoparticles of  $Al_2O_3$  were added to water at a rate of 4% to improve the thermal performance and efficiency of the heat exchange. To the author's knowledge, this works the first to study employ nanofluid as a coolant in solar cells with three-dimensional effect using CFD technology.

## 2. COMPUTATIONAL FLUID DYNAMICS (CFD) SIMULATION MODEL

The CFD simulation used for the branch of fluid mechanics calculates the numerical results. Thus, the CFD was using a finite element method to simulation an engineering problem. So, the numerical technique can be used to calculate the results for significant engineering problems, and its results were agreement results with comparison by experimental and analytical results, [7-11].

### 2.1 Computational Domain and Solution Method

The computational domains of the photovoltaic cell structure in this work are prepared from three layers with a total area of  $90\text{ cm} \times 60\text{ cm}$ . The first layer is glass, then the solar cell (crystalline cells), and the last layer is an aluminium plate. Water/Nanofluid flows through a fixed serpentine circular pipe behind the aluminium plate with 1 cm diameter. The mesh type of quadratic elements has been used in the current three-dimensional model (Figure 1). The finite-volume method has been applied to discretizing and solving the governing equations using the multi-physics computational fluid dynamics code of COMSOL. A mesh independence study was considered in this work to ensure that the solution independent of the mesh size. The analysis begins with a mathematical model of the heat transfer and fluid flow equations, where the conservation of matter, momentum, and energy have satisfied throughout the region of this domain. Physical properties have been specified with high precision to all part of this model such as viscosity, thermal conductivity, specific heat, and density to define a problem. The thermal performance characteristics of the solar cell cooling based on a certain parameter can be obtained by varying that parameter (type of coolant - water or nanofluid) while keeping all other parameters constant at the base case. Therefore, for the base case study, the inlet coolant temperature was considered to be  $25\text{ }^{\circ}\text{C}$ , and the ambient temperature was  $40\text{ }^{\circ}\text{C}$ . A constant solar radiation intensity of  $800\text{ W/m}^2$  was applied to this photovoltaic cell panel. The inlet coolant temperature was considered to be  $25\text{ }^{\circ}\text{C}$ , and the ambient temperature was  $40\text{ }^{\circ}\text{C}$ . A constant solar radiation intensity of  $800\text{ W/m}^2$  was applied to this photovoltaic cell panel. The velocities of the coolant were assumed uniform at the inlet of the flow field, while the pressures of each of them were assumed uniform at the outlet. The coupled equations were solved using an iterative solution. A criterion of error less than or equal to  $1.0 \times 10^{-6}$  was assumed adequate to achieve the solution convergence [12].

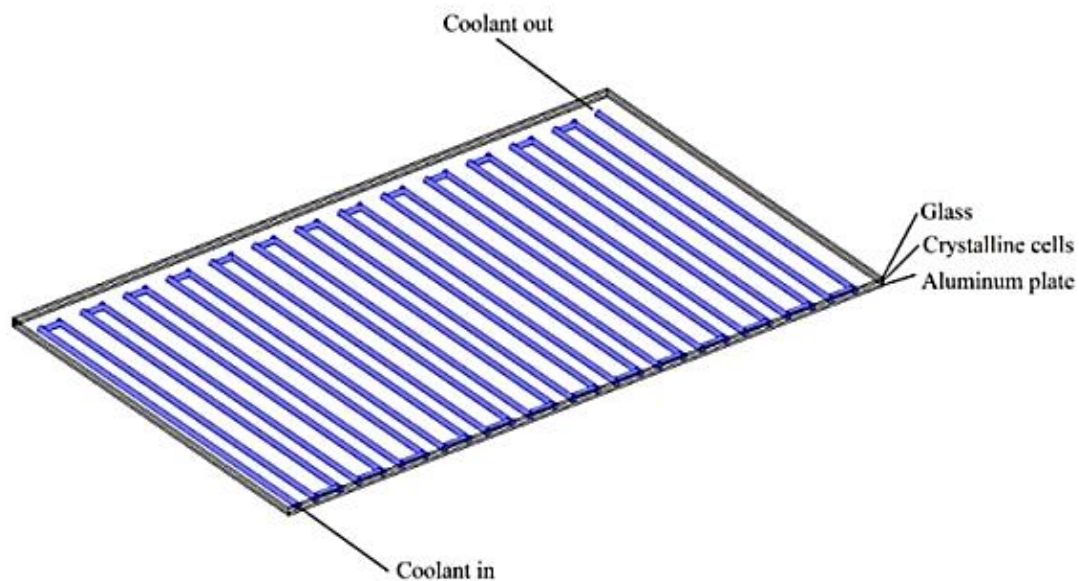

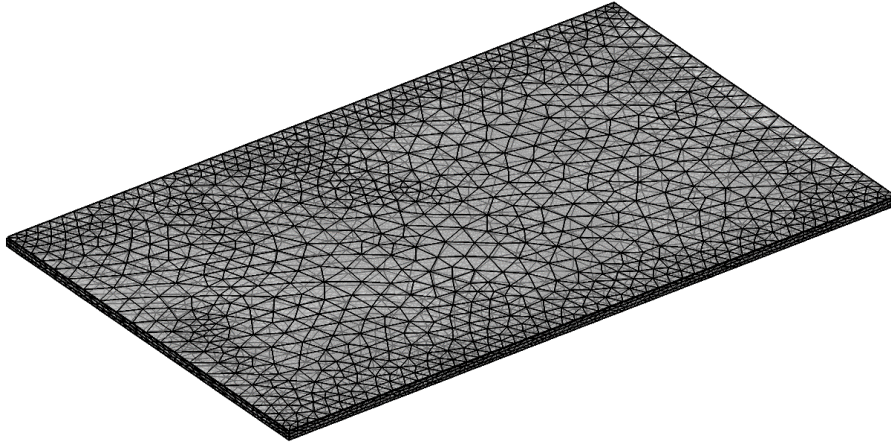


Figure 1. Computational domain and mesh of the photovoltaic cell panel.

## 2.2 Conservation Equations

Reynolds-averaged Navier–Stokes equations (RANS) for the momentum conservation, and also the continuity equations for the turbulence flow model, are expressed as [13, 14],

$$\rho \frac{\partial U}{\partial t} + \rho U \cdot \nabla U + \nabla \cdot (\overline{\rho u' \otimes u'}) = -\nabla P + \nabla \cdot (\mu (\nabla U + (\nabla U)^T)) + F \quad (1)$$

$$\rho \nabla \cdot U = 0 \quad (2)$$

Where,  $U$  is defined as the average of the fluid velocity, while  $\otimes$  it stands for the outer vector product.  $k$ - $\omega$  model for flows involving strong streamline curvature where preparation of this turbulence model is as follows [13, 15],

$$\rho \frac{\partial k}{\partial t} + \rho u \cdot \nabla k = P_k - \rho \beta^* k \omega + \nabla \cdot ((\mu + \sigma^* \mu_T) \nabla k) \quad (3)$$

$$\rho \frac{\partial \omega}{\partial t} + \rho u \cdot \nabla \omega = \alpha \frac{\omega}{k} P_k - \rho \beta \omega^2 + \nabla \cdot ((\mu + \sigma \mu_T) \nabla \omega) \quad (4)$$

Where,

$$\mu_T = \rho \frac{k}{\omega} \quad (5)$$

$$\alpha = \frac{13}{25}, \beta = \beta_o f_\beta, \beta^* = \beta_o^* f_\beta, \sigma = \frac{1}{2}, \sigma^* = \frac{1}{2} \quad (6)$$

$$\beta_o = \frac{13}{125}, f_\beta = \frac{1+70X_\omega}{1+80X_\omega}, X_\omega = \left| \frac{\Omega_{ij} \Omega_{jk} S_{ki}}{(\beta_o^* \omega)^3} \right| \quad (7)$$

$$\beta_o^* = \frac{9}{100} f_\beta^* = \begin{cases} 1 & \text{for } X_k \leq 0 \\ \frac{1+680X_k^2}{1+400X_k^2} & \text{for } X_k > 0 \end{cases}, X_k = \frac{1}{\omega^3} (\nabla k \cdot \nabla \omega) \quad (8)$$

Where,  $\omega_{ij}$  denotes the mean tensor of rotation rate,

$$\Omega_{ij} = \frac{1}{2} \left( \frac{\partial \bar{u}_i}{\partial x_j} - \frac{\partial \bar{u}_j}{\partial x_i} \right) \quad (9)$$

And,  $S_{ij}$  is the mean strain rate tensor,

$$S_{ij} = \frac{1}{2} \left( \frac{\partial \bar{u}_i}{\partial x_j} + \frac{\partial \bar{u}_j}{\partial x_i} \right) \quad (10)$$

$$P_k = \mu_T \left( \nabla u : (\nabla u + (\nabla u)^T) - \frac{2}{3} (\nabla \cdot u)^2 \right) - \frac{2}{3} \rho k \nabla \cdot u \quad (11)$$

### 2.3 Cooling Fluid Thermophysical Properties

Water is the base fluid for the coolant ("bf"), and the thermophysical properties for water that depend on its temperature can be calculated from the following equations [5];

$$\rho_{bf} = \frac{999.84 + 18.225(T+273.15) - 7.92 \times 10^{-3}(T+273.15)^2 - 5.545 \times 10^{-5}(T+273.15)^3 + 1.498 \times 10^{-7}(T+273.15)^4 - 3.933 \times 10^{-10}(T+273.15)^5}{1 + 1.816 \times 10^{-2}(T+273.15)} \left( \frac{\text{kg}}{\text{m}^3} \right) \quad (12)$$

$$\mu_{bf} = 2.414 \times 10^{-5} \times 10^{\left( \frac{247.8}{T-140} \right)} \left( \frac{\text{kg} \cdot \text{m}}{\text{s}} \right) \quad (13)$$

$$C_{p_{bf}} = (8958.9 - 40.535T + 0.11243T^2 - 1.014 \times 10^{-4}T^3) \quad (\text{J/kg} \cdot \text{K}) \quad (14)$$

$$k_{bf} = (-0.58166 + 6.3556 \times 10^{-3}T - 7.964 \times 10^{-6}T^2) \quad (\text{W/m} \cdot \text{K}) \quad (15)$$

The nanoparticles Alumina ( $\text{Al}_2\text{O}_3$ ) is used to prepare the nanofluid with water and used in the coolant pipe. Alumina's choosing is because it is characterized by excellent chemical stability in water and its low cost and safety compared to other types of nanoparticles. The nanofluids' thermophysical properties "nf" depends on the volume fraction  $\phi$  of the nanoparticles "np" in the suspension and can be calculated through the following equations [16, 17],

$$\rho_{nf} = (1 - \phi) \cdot \rho_{bf} + \phi \rho_{np} \quad (16)$$

$$\rho_{nf} C_{p_{nf}} = (1 - \phi) \cdot \rho_{bf} C_{p_{bf}} + \phi \rho_{np} C_{p_{np}} \quad (17)$$

Based on the Brownian motion of nanoparticles, the thermal conductivity is calculated as,

$$k_{eff} = k_{static} + k_{Brownian} \quad (18)$$

The static thermal conductivity is calculated as,

$$k_{static} = k_{bf} \left( \frac{k_{np} + 2k_{bf} - 2(k_{bf} - k_{np})\phi}{k_{np} + 2k_{bf} + (k_{bf} - k_{np})\phi} \right) \quad (19)$$

The Brownian thermal conductivity values for the nanofluid coolant are calculated as,

$$k_{Brownian} = 5 \times 10^4 \beta \cdot \phi \cdot \rho_{bf} \cdot C_{p_{bf}} \sqrt{\frac{\sigma_B \cdot T}{\rho_{np} \cdot d_{np}}} \cdot f(T, \phi) \quad (20)$$



The dynamic viscosity is given as,

$$\mu_{\text{eff}} = \mu_{\text{static}} + \mu_{\text{Brownian}} \quad (21)$$

$$\mu_{\text{static}} = \frac{\mu_{\text{bf}}}{(1-\phi)^{2.5}} \quad (22)$$

$$\mu_{\text{Brownian}} = 5 \times 10^4 \beta \cdot \phi \cdot \rho_{\text{bf}} \cdot \sqrt{\frac{\sigma_{\text{B}} \cdot T}{\rho_{\text{np}} \cdot d_{\text{np}}}} \cdot f(T, \phi) \quad (23)$$

$$f(T, \phi) = (2.8217 \times 10^{-2} \phi + 3.917 \times 10^{-3}) \left( \frac{T}{T_0} \right) + (-3.0699 \times 10^{-2} \phi - 3.91123 \times 10^{-3}) \quad (24)$$

$\beta$  is defined as the fraction of the liquid volume moving with the nanoparticles and are listed in Table 1.  $\sigma_{\text{B}}$  is the Boltzmann constant. Finally,  $d_{\text{np}}$  is the diameter of the Alumina's particles suspended in the nanofluids [nm]. The thermophysical properties of the  $\text{Al}_2\text{O}_3$  nanoparticles calculated at the reference temperature of 300 K are listed in Table 2.

**Table 1** Values of  $\beta$  for  $\text{Al}_2\text{O}_3$  nanoparticles

| Nano particles          | $\beta$                      | Volume fraction [%]       | Temperature [K]                |
|-------------------------|------------------------------|---------------------------|--------------------------------|
| $\text{Al}_2\text{O}_3$ | $8.4407(100\phi)^{-1.07304}$ | $1\% \leq \phi \leq 10\%$ | $298 \leq T \leq 363\text{ K}$ |

**Table 2** The thermophysical properties of  $\text{Al}_2\text{O}_3$  nanoparticles at  $T=300\text{K}$ , [16].

| Thermophysical properties           | $\text{Al}_2\text{O}_3$ |
|-------------------------------------|-------------------------|
| Density $\rho$ (kg/m <sup>3</sup> ) | 3970                    |
| Thermal conductivity $k$ (W/m.K)    | 40                      |
| Specific heat $C_p$ (J/kg.K)        | 765                     |

## 2.4 Data Acquisition

The equivalent coefficient of the heat transfer ( $h$ ) is calculated as,

$$h = \frac{Q}{A \cdot (T_{\text{hot}} - T_{\text{cold}})} \quad (25)$$

Where  $Q$  is the total heat transmission [W],  $A$  is the total surface area [m<sup>2</sup>], and  $T$  is the fluid temperature [K]. A solar cell's efficiency is very much affected by its temperature. The energy of solar radiation that falls on the solar cell turns into two parts. The cell converts part of this radiation energy into electrical energy while absorbing the other part of this energy. This last part will be responsible for heating the solar cell and raising its temperature. While the electrical energy is removed from the cell through the external circuit, the thermal energy is dissipated by a combination of heat transfer mechanisms. The heat dissipation from the bottom surface of the solar cell is critical to the performance of the solar cell, where the most significant possible amount of thermal energy must be dissipated from the solar cell so that the cell operates at the lowest possible temperature; thus, obtaining the highest efficiency from it. Using the energy

balance, the solar cell temperature's in working mode can be determined. The electrical efficiency of the solar cell panel, as a function of temperature, is given by,


$$\eta_{el} = \eta_o(1 - \beta_o(T_c - 298.15)) \quad (26)$$

Where,  $\eta_o$  is the efficiency of PV module at Standard Testing Conditions at the temperature of 298.15 K,  $\beta_o$  silicon efficiency temperature coefficient (0.004 K<sup>-1</sup>, [18]), and  $T_c$  average cell temperature [K].


### 3. RESULTS AND DISCUSSION

In this study, three-dimensional modelling of a photovoltaic cell consists of three layers was performed. The serpentine circular pipe has been fixed behind the aluminium plate and used as a heat exchanger to transfer the heat from the photovoltaic cell to the pipe fluid and reduces the photovoltaic cell temperature. Nanoparticles of Al<sub>2</sub>O<sub>3</sub> were added to water at a rate of 4% to improve the thermal performance and efficiency of the heat exchange. The results showed an improvement of approximately 10% in the photovoltaic electrical efficiency when using the water cooling method and about 12% when using the nanofluid. The importance of the results in this study illustrates the possibility of increasing the efficiency of the photovoltaic cell by cooling it with water using a small percentage of nanoparticles. The temperature distribution in the photovoltaic cell structure with a range of Reynolds numbers are presented well in this section, as shown in Figures 2 to 6.


Figure 2 shows the temperature distribution in the photovoltaic cell structure as a result of exposure to solar radiation without using cooling. The results show that the maximum temperature (56 °C) occurs at the top glass layer of the cell, where exposed to the highest solar radiation. The arrival of the photovoltaic cell to a high temperature negatively affects its performance, and its efficiency decreases significantly. To maintain the nominal efficiency, the photovoltaic cell must be cooled. Figure 3 shows the temperature distribution in the photovoltaic cell structure when cooling using water for a range of Reynolds numbers. The results show a significant decrease in temperature inside the photovoltaic cell when it is cooled by water, and the temperature decreases more with the increase in the flow velocity of the water (Reynolds numbers). Figure 4 shows the temperature distribution in the photovoltaic cell structure when using Al<sub>2</sub>O<sub>3</sub> nanofluid as a cooling, for a range of Reynolds numbers. The results show a very important decrease in the temperature of the cell when it is cooled using nanofluids than when using water only, and the temperature decreases further with the increase in the speed of the water flow (Reynolds numbers). This result demonstrates the increase of cooling efficiency when using Al<sub>2</sub>O<sub>3</sub> nanofluid, which leads to the possibility of minimizing the volume of the heat exchanger used and raise its efficiency. In addition, Figures 2 and 3 show that for the coolant flow, the photovoltaic cell temperature values are less low through the flow direction, and the maximum value of the temperature takes place at the exit of the coolant through the pipe channel. Figure 5 shows the photovoltaic average cell temperature as a function of Reynolds numbers. The results show that an increase in the velocity of the cooling fluid flow (Reynolds numbers) leads to a decrease in the average temperature of the cell, which leads to an improvement in its performance, but in return, the increases in pumping power cost. The Figure 5 also shows the effectiveness of Al<sub>2</sub>O<sub>3</sub> nanofluid in increasing the decrease in cell temperature. Figure 6 shows the photovoltaic electrical efficiency reduction as a function of Reynolds numbers. The results show the effectiveness of the cooling method especially when using Al<sub>2</sub>O<sub>3</sub> nanofluids. The results show that there is an improvement of approximately 10% in the photovoltaic electrical efficiency when using the water cooling method and about 12% when using the Al<sub>2</sub>O<sub>3</sub> nanofluid.

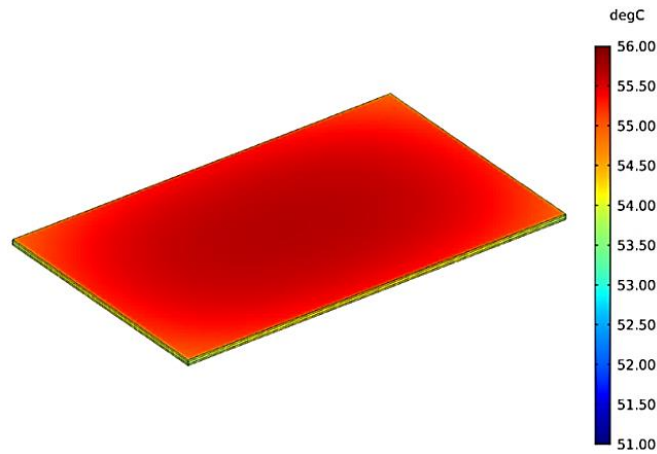


**Figure 2.** Temperature distribution in the photovoltaic cell structure without cooling (°C).

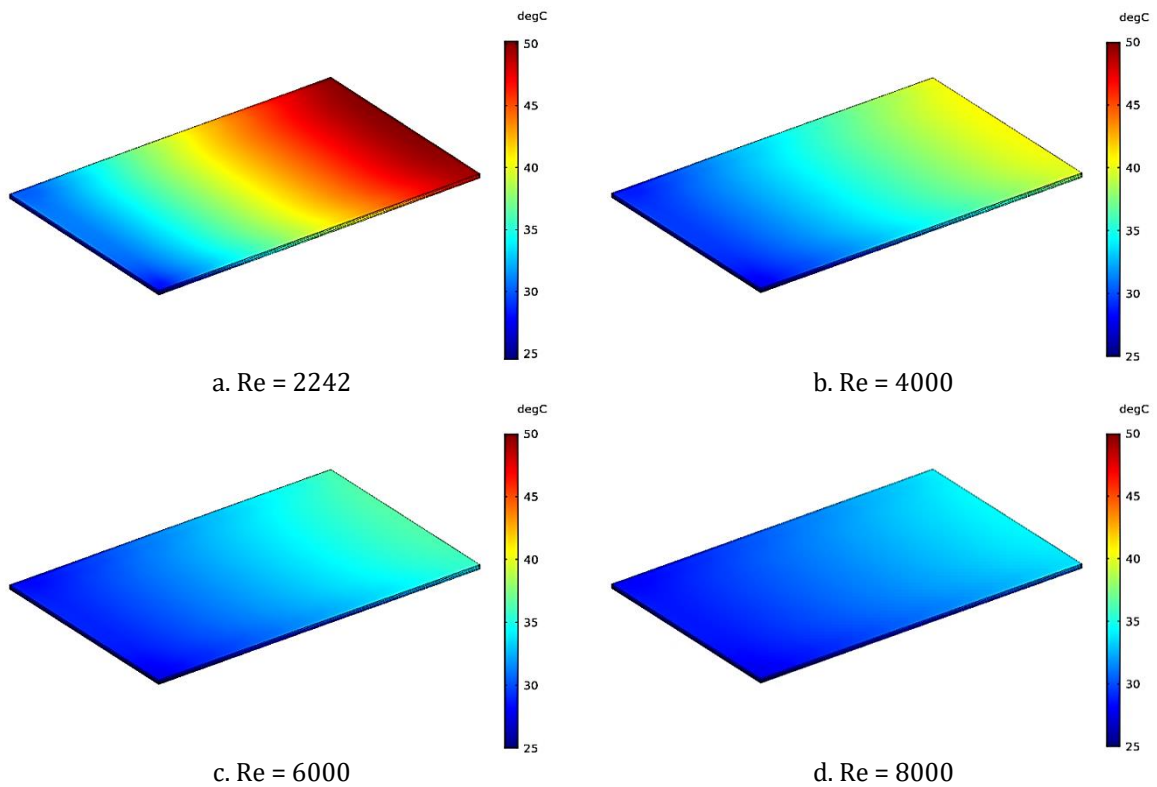




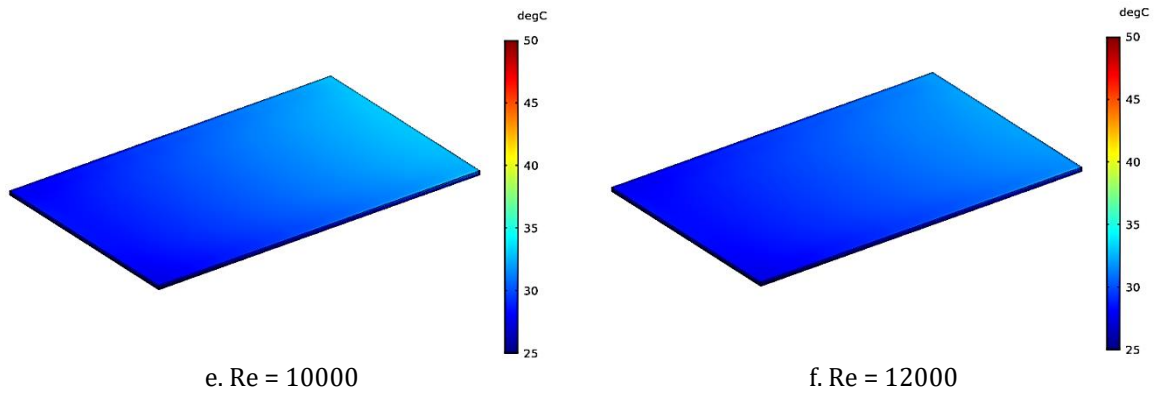


**Figure 3.** Temperature distribution in the photovoltaic cell structure with water cooling ( $^{\circ}\text{C}$ ) for a range of Reynolds numbers.

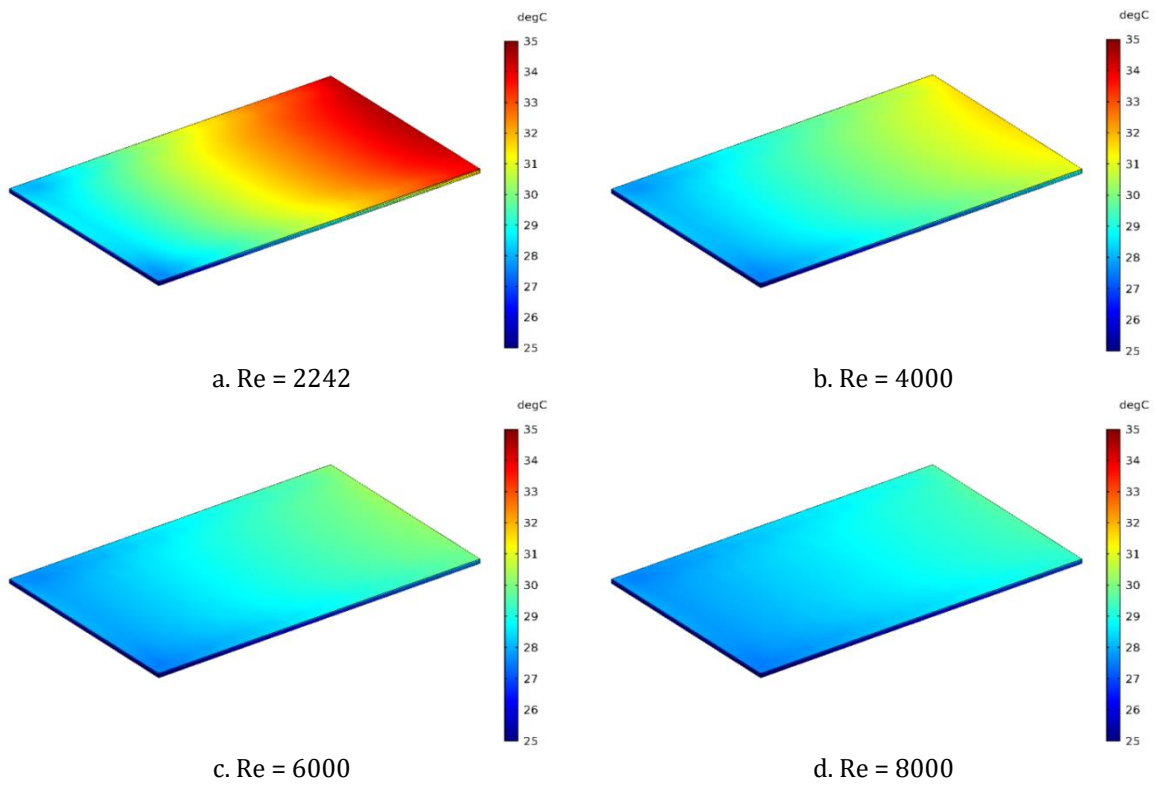


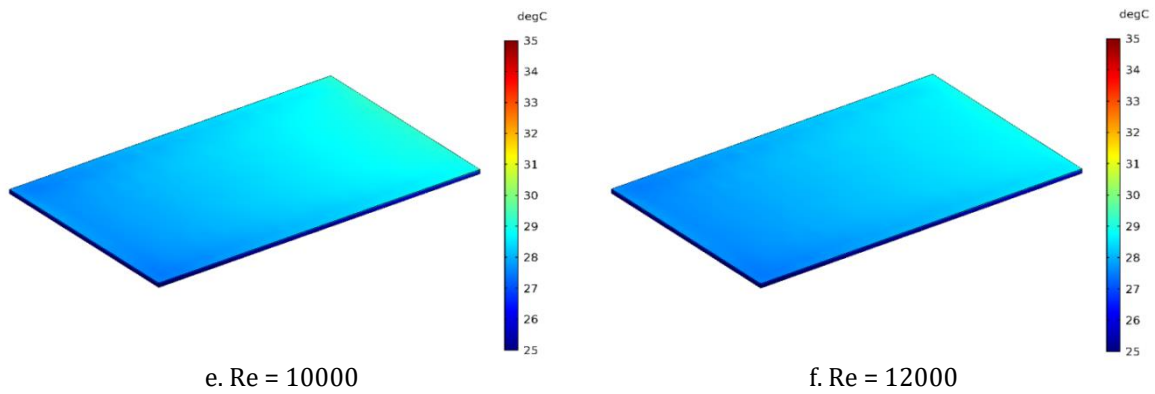

**Figure 4.** Temperature distribution in the photovoltaic cell structure with nanofluid Al<sub>2</sub>O<sub>3</sub> cooling (°C) for a range of Reynolds numbers.

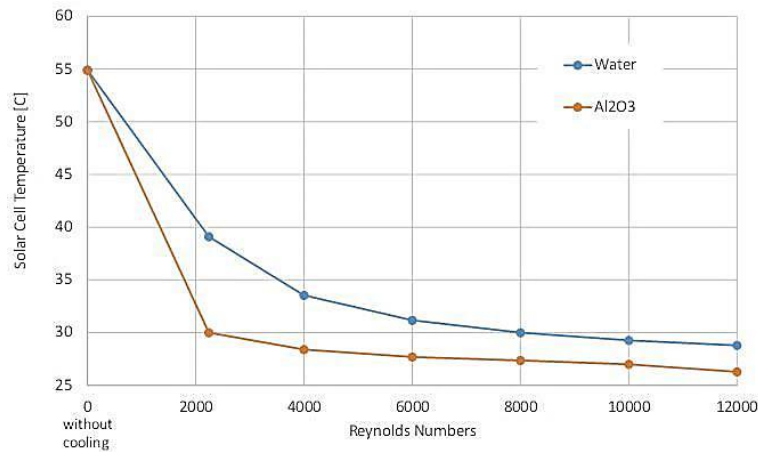

**Figure 5.** Photovoltaic average cell temperature as a function of Reynolds numbers.

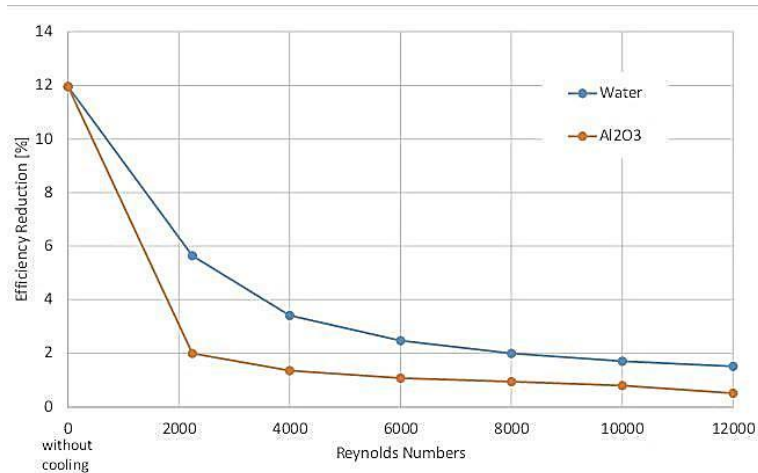

**Figure 6.** Photovoltaic electrical efficiency reduction as a function of Reynolds numbers.

#### 4. CONCLUSION

Note: Accepted manuscripts are articles that have been peer-reviewed and accepted for publication by the Editorial Board. These articles have not yet been copyedited and/or formatted in the journal house style.

Three-dimensional CFD simulation model thru the finite volume method was used to study the effect of cell temperature on the performance and efficiency of a photovoltaic cell panel. The cooling techniques used in this work it is a serpentine circular pipe fixed behind the aluminium plate and used as a heat exchanger to transfer the heat from the photovoltaic cell to the pipe fluid and reduces the photovoltaic cell temperature. Nanoparticles of  $Al_2O_3$  were added to water at a rate of 4% to improve the thermal performance and efficiency of the heat exchange. The results showed an improvement of approximately 10% in the photovoltaic electrical efficiency when using the water cooling method and about 12% when using the nanofluid. In addition, to enhance efficiency, the heat transferred from the photovoltaic cell can be utilized in many practical applications. The importance of the results in this study illustrates the cooling techniques for the photovoltaic cell is essential in hot environment regions, and the nanofluids coolant are very helpful to support this technique..

## REFERENCES

- [1] P. L. Ahmed Chong, H. K. Lau, "Solar Cells Design and Simulation," International Conference on Renewable Energy. (2017) 78-100.
- [2] S. Y. Lok, J. M. Kong, "Aluminium Fins Method for Solar PV Cooling," IEEE Trans on Renewable Energy. (2018) 78-100.
- [3] A. R. Norazlina, Salina, "Electrical Fan for 100 W PV Cooling System," IEEE Trans on Electrical Engineering. (2016) 56-68.
- [4] S. Rose, Donita, "Introducing Heat Rubber Absorber for PV Temperature Reduction," International Journal on Engineering and Technology. (2016) 1-18.
- [5] Ahmad Pordanjani, Saeed Aghakhani, Masoud Afrand, Boshra Mahmoudi, Omid Mahian, Somchai Wongwises, "An updated review on application of nanofluids in heat exchangers for saving energy", Energy Conversion and Management, 198, 111886 (2019).
- [6] Naimish S. Pandya, Harshang Shah, Maysam Molana, Arun Kumar Tiwari, "Heat transfer enhancement with nanofluids in plate heat exchangers: A comprehensive review", European Journal of Mechanics - B/Fluids, 81 (2020) 173-190.
- [7] Ehab N. Abbas, Muhsin J. Jweeg, Muhannad Al-Waily, "Analytical and Numerical Investigations for Dynamic Response of Composite Plates Under Various Dynamic Loading with the Influence of Carbon Multi-Wall Tube Nano Materials," International Journal of Mechanical & Mechatronics Engineering. 18, 6 (2018) 1-10.
- [8] Muhannad Al-Waily, Emad Q. Hussein, Nibras A. Aziz Al-Roubaiee, "Numerical Modeling for Mechanical Characteristics Study of Different Materials Artificial Hip Joint with Inclination and Gait Cycle Angle Effect," Journal of Mechanical Engineering Research & Developments. 42, 4 (2019) 79-93.
- [9] Esraa A. Abbod, Muhannad Al-Waily, Ziadoon M. R. Al-Hadrayi, Kadhim K. Resan, Saif M. Abbas, "Numerical and Experimental Analysis to Predict Life of Removable Partial Denture," IOP Conference Series: Materials Science and Engineering, 1<sup>st</sup> International Conference on Engineering and Advanced Technology, 870 (2020).
- [10] Tammam Salim Naji Aswad, Mohd Azahari Bin Razali, Muhannad Al-Waily, "Numerical Study of the Shape Obstacle Effect on Improving the Efficiency of Photovoltaic Cell," Journal of Mechanical Engineering Research and Developments. 44, 2 (2021) 209-224.
- [11] Muhsin J. Jweeg, H. A. Hamzah, Muhannad Al-Waily, Mohsin Abdullah Al-Shammari, "A Finite Element Simulation of Nano Effects on Stress Distribution in a Below Knee

- Prosthetic,” 4<sup>th</sup> International Conference on Engineering Sciences, IOP Conference Series: Materials Science and Engineering, 1067 (2021).
- [12] Maher A. R. Sadiq Al-Baghdadi, “A CFD analysis of transport phenomena and electrochemical reactions in a tubular-shaped ambient air-breathing PEM micro fuel cell,” *Trans. Hong Kong Inst. Eng. (HKIE Trans.)*. 17, 2 (2010) 1–8.
- [13] Rasha Hayder Al-Khayat, Maher A.R. Sadiq Al-Baghdadi, Ragad Aziz Neama, Muhannad Al-Waily, “Optimization CFD study of erosion in 3D elbow during transportation of crude oil contaminated with sand particles,” *International Journal of Engineering & Technology*. 7, 3 (2018) 1420-1428.
- [14] Maher A.R. Sadiq Al-Baghdadi, “A CFD study of hygro-thermal stresses distribution in PEM fuel cell during regular cell operation,” *Renewable Energy*. 34, 3 (2009) 674–682.
- [15] Maher A.R. Sadiq Al-Baghdadi, “Prediction of deformation and hygro-thermal stresses distribution in ambient air-breathing PEM fuel cells using three-dimensional CFD model,” *Recent Patents Mech. Eng.* 2, 1 (2009) 26–39.
- [16] Maher A. R.Sadiq Al-Baghdadi, Zainab M.H.Noor, Aimen Zeiny, Alan Burns, Dongsheng Wen, “CFD analysis of a nanofluid-based microchannel heat sink,” *Thermal Science and Engineering Progress*. 20 (2020).
- [17] Aimen Zeiny, Maher A.R. Sadiq Al-Baghdadi, Ahmed Salih Al-Akaishi, H. Jin, Dongsheng Wen, “New aqueous solution for direct solar absorption refrigeration systems,” *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*. 66, 2 (2020) 114-124.
- [18] D. L. Evans, “Simplified Method for Predicting Photovoltaic Array Output,” *Solar Energy*. 27, 6 (1981) 555-560.